

Solenoid valves 2/2-way servo-operated

Type EV220A 6-50

Features



EV220A


- Compact solenoid valve for robust industrial applications
- Liquid hammer damped
- Low power consumption
- NO version, standard for ¼" to 1" valve sizes
- NC version, standard for ¼" to 2" valve sizes
- For water, oil, compressed air and similar neutral media
- Differential pressure: Up to 16 bar
- Viscosity: Up to 50 cSt
- Ambient temperatures: Up to +50°C
- Enclosure: Up to IP 65

Technical data

Type	EV220A 6B	EV220A 10B	EV220A 12B	EV220A 14B	EV220A 18B	EV220A 22B	EV220A 32B	EV220A 40B	EV220A 50B
Capacity, k_v (m ³ /h)	1	1.6	2.5	4	7	7	15	18	32
Differential pressure range	0.2 - 16 bar			0.3 - 16 bar					
Max.test pressure	50 bar			25 bar					
Opening times ¹⁾ ms	40	50	60	100	200	200	2500	4000	5000
Closing times ¹⁾ ms	250	300	300	400	500	500	4000	6000	10000
Ambient temperature	Max. +50°C								
Media temperature	NBR: -10 → +90°C / EPDM: -30 → +100°C FKM: 0 → +100°C / FKM for water max. +60°C								
Media viscosity	+50cSt								
Materials	Valve body: Brass,..... W. no. 2.0401 Armature: Stainless steel, W. no. 1.4105 / AISI 430FR Armature stop: Stainless steel, W. no. 1.4105 / AISI 430FR Armature tube: Stainless steel, W. no. 1.4303 / AISI 305 Spring: Stainless steel, W. no. 14310 / AISI 301 O-ring: NBR, EPDM or FKM Valve plate: NBR, EPDM or FKM For NO: NBR Diaphragm: NBR, EPDM or FKM								

1) Times are indicative and apply to water. Exact times will depend on pressure conditions.

Function

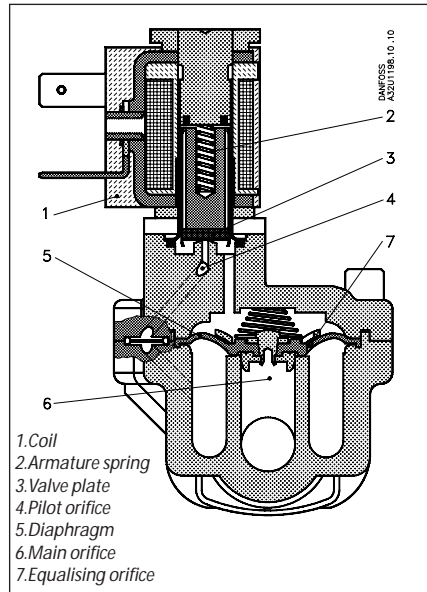

De-energized closed version

Coil voltage disconnected

When voltage is disconnected, the armature spring (2) presses the armature block (3) down against the pilot orifice (4). Pressure builds up over the diaphragm (5) via the equalising orifice (7). The diaphragm closes the main orifice (6) as soon as the pressure over the diaphragm equals the inlet pressure. The valve stays closed for as long as voltage remains disconnected.

Coil voltage connected (open)

When voltage is applied to the coil (1), the pilot orifice (4) is opened. Since the pilot orifice is larger than the equalising orifice (7), pressure over the diaphragm (5) falls and the diaphragm is lifted clear of the main orifice (6). The valve stays open for as long as the required least differential pressure is present and voltage is applied to the coil.

De-energized open version

In principle the function involves valve positions opposite to the above for applied and disconnected voltage respectively.

Ordering NC

Valve body

Con- nec- tion ISO 228/1	Seal material	k _v - Value [m ³ /h]	Media temp.		Type designation		Permissible differential pressure (bar)/Coil type	Max. ³⁾					Code no. without coil	
			Min. [°C]	Max. [°C]	Main type	Specification		Min	Max. ³⁾					
									AB		AM			AK
									4.5 W ac	5.0 W dc	7.5 W ac	9.5 W dc		
G ¼ G ¼ G ¼	EPDM ¹⁾ NBR FKM ²⁾	1 1 1	-30 -10 0	+100 +90 +100	EV220A 6B EV220A 6B EV220A 6B	G 14E NC000 G 14N NC000 G 14F NC000	0.2	10 10 10	10 10 10	16 16 16	16 16 16	10 10 10	042U4001 042U4003 042U4005	
G ⅜ G ⅜ G ⅜	EPDM ¹⁾ NBR FKM ²⁾	1 1 1	-30 -10 0	+100 +90 +100	EV220A 6B EV220A 6B EV220A 6B	G 38E NC000 G 38N NC000 G 38F NC000		0.2	10 10 10	10 10 10	16 16 16	16 16 16	10 10 10	042U4002 042U4004 042U4006
G ⅜ G ⅜ G ⅜	EPDM ¹⁾ NBR FKM ²⁾	1.6 1.6 1.6	-30 -10 0	+100 +90 +100	EV220A 10B EV220A 10B EV220A 10B	G 38E NC000 G 38N NC000 G 38F NC000			0.2	10 10 10	10 10 10	16 16 16	16 16 16	10 10 10
G ½ G ½ G ½	EPDM ¹⁾ NBR FKM ²⁾	1.6 1.6 1.6	-30 -10 0	+100 +90 +100	EV220A 10B EV220A 10B EV220A 10B	G 12E NC000 G 12N NC000 G 12F NC000	0.2			10 10 10	10 10 10	16 16 16	16 16 16	10 10 10
G ½ G ½ G ½	EPDM ¹⁾ NBR FKM ²⁾	2.5 2.5 2.5	-30 -10 0	+100 +90 +100	EV220A 12B EV220A 12B EV220A 12B	G 12E NC000 G 12N NC000 G 12F NC000		0.3		10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G ½ G ½ G ½	EPDM ¹⁾ NBR FKM ²⁾	4 4 4	-30 -10 0	+100 +90 +100	EV220A 14B EV220A 14B EV220A 14B	G 12E NC000 G 12N NC000 G 12F NC000			0.3	10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G ¾ G ¾ G ¾	EPDM ¹⁾ NBR FKM ²⁾	7 7 7	-30 -10 0	+100 +90 +100	EV220A 18B EV220A 18B EV220A 18B	G 34E NC000 G 34N NC000 G 34F NC000	0.3			10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G 1 G 1 G 1	EPDM ¹⁾ NBR FKM ²⁾	7 7 7	-30 -10 0	+100 +90 +100	EV220A 22B EV220A 22B EV220A 22B	G 1E NC000 G 1N NC000 G 1F NC000		0.3		10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G 1 ¼ G 1 ¼ G 1 ¼	EPDM NBR FKM ²⁾	15 15 15	-30 -10 0	+100 +90 +100	EV220A 32B EV220A 32B EV220A 32B	G114E NC000 G114N NC000 G114F NC000			0.3	10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G 1 ½ G 1 ½ G 1 ½	EPDM NBR FKM ²⁾	18 18 18	-30 -10 0	+100 +90 +100	EV220A 40B EV220A 40B EV220A 40B	G112E NC000 G112N NC000 G112F NC000	0.3			10 10 10	10 10 10	16 16 10	16 16 10	10 10 10
G 2 G 2 G 2	EPDM NBR FKM ²⁾	32 32 32	-30 -10 0	+100 +90 +100	EV220A 50B EV220A 50B EV220A 50B	G 2E NC000 G 2N NC000 G 2F NC000		0.3		10 10 10	10 10 10	16 16 10	16 16 10	10 10 10

1) Suitable only for water. - WRAS approved.

2) Suitable for oil and air, water max. +60°C

3) For higher differential pressure than stated, please contact Danfoss.


Ordering NO

Valve body


Con- nec- tion ISO 228/1	Seal mate- rial	k _v - Value [m ³ /h]	Media temp.		Type designation		Permissible differential pressure (bar)/Coil type					Code no. without coil	
			Min. [°C]	Max. [°C]	Main type	Specification	Min.	Max. ²⁾					
								AB		AM			AK
								4.5 W ac	5.0 W dc	7.5 W ac	9.5 W ac		3.0 W dc
G ¼	NBR ¹⁾	1	-10	+90	EV220A 6B	G 14N NO000	0.2	-	-	16	16	-	042U4053
G ½	NBR ¹⁾	1.6	-10	+90	EV220A 10B	G 12N NO000	0.2	-	-	16	16	-	042U4064
G ½	NBR ¹⁾	2.5	-10	+90	EV220A 12B	G 12N NO000	0.3	-	-	16	16	-	042U4073
G ½	NBR ¹⁾	4	-10	+90	EV220A 14B	G 12N NO000	0.3	-	-	16	16	-	042U4074
G ¾	NBR ¹⁾	7	-10	+90	EV220A 18B	G 34N NO000	0.3	-	-	16	16	-	042U4082
G 1	NBR ¹⁾	7	-10	+90	EV220A 22B	G 1N NO000	0.3	-	-	16	16	-	042U4092

1) NBR is suitable for oil, water and air.
2) For higher differential pressure than stated, please contact Danfoss.

Coil options



Type AB:
4.5 W ac / 5.0 W dc
IP00




Type AM: 7.5 W ac / 9.5 W dc
Type AK: 3.0 W dc
IP00

Ordering Coils


See separate data sheet for coils IC.PD.600.A

Dimensions and weight

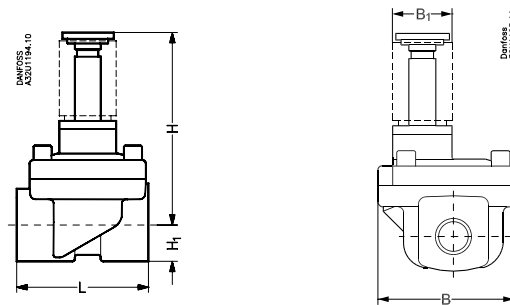

Type	L [mm]	B [mm]	B ₁ [mm]		H [mm]		H ₁ [mm]	Weight without coil [kg]
			Coil type AB	Coil type AM/AK/AR	NC	NO		
EV220A 6B	51	50	22	33	76	80	13	0.46
EV220A 10B	51	50	22	33	76	80	13	0.44
EV220A 12B	58	58	22	33	77	81	13	0.52
EV220A 14B	58	58	22	33	77	81	13	0.50
EV220A 18B	90	58	22	33	78	82	18	0.72
EV220A 22B	90	58	22	33	83	87	22	1
EV220A 32B	120	82	22	33	95		27	2
EV220A 40B	130	95	22	33	105		32	3.2
EV220A 50B	162	113	22	33	111		37	4.3

Spare parts kit for NC version

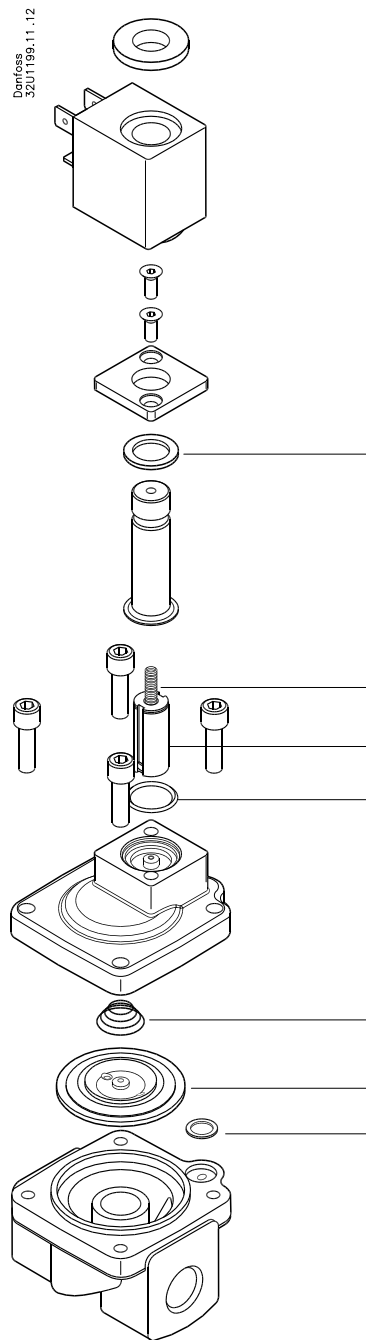

Spare parts kit comprising armature assembly, diaphragm assembly, armature spring, diaphragm spring and two O-rings.

Type	Seal material	Code no.
EV220A 6 - 10B	EPDM ¹⁾	042U1000
EV220A 6 - 10B	NBR ²⁾	042U1001
EV220A 6 - 10B	FKM ³⁾	042U1002
EV220A 12 - 14B	EPDM ¹⁾	042U1003
EV220A 12 - 14B	NBR ²⁾	042U1004
EV220A 12 - 14B	FKM ³⁾	042U1005
EV220A 18 - 22B	EPDM ¹⁾	042U1006
EV220A 18 - 22B	NBR ²⁾	042U1007
EV220A 18 - 22B	FKM ³⁾	042U1008
EV220A 32B	EPDM ¹⁾	042U1037
EV220A 32B	NBR ²⁾	042U1038
EV220A 32B	FKM ³⁾	042U1046
EV220A 40B	EPDM ¹⁾	042U1039
EV220A 40B	NBR ²⁾	042U1040
EV220A 40B	FKM ³⁾	042U1047
EV220A 50B	EPDM ¹⁾	042U1041
EV220A 50B	NBR ²⁾	042U1042
EV220A 50B	FKM ³⁾	042U1048

1) Suitable for water.

2) Suitable for water, oil and air.

3) Suitable for oil and air. Water max. +60°C

Media resistance

Please contact Danfoss

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.