

# BD35K Direct Current Compressor for Solar Applications R600a, 10 - 45V

## General

Code number (without electronic units)	101Z0211
Electronic unit - for solar applications	101N0400, 30 pcs: 101N0401
Electronic unit 12-24V DC - standard	101N0210, 30 pcs: 101N0211
Electronic unit 12-24V DC - with metal shielding	101N0220, 30 pcs: 101N0221
Approved compressor - electronic unit combinations	refer to <i>Instructions</i> for 101N0xxx
Additional approvals	e4, C-Tick
Compressors on pallet	150

## Application

Application		LBP/MBP/(HBP)
Evaporating temperature	°C	-30 to 0 (10)
Voltage range	VDC	10 - 45
Max. condensing temperature continuous (short)	°C	60 (70)
Max. winding temperature continuous (short)	°C	125 (135)

## Cooling requirements

Application	LBP	MBP	HBP
32°C	S	S	S
38°C	S	S	S
43°C	S	S	S

Remarks on application: - Fan cooling F1 depending on application and speed.  
- **for stationary use only**

## Motor


Motor type		Variable speed
Resistance, all 3 windings (25°C)	Ω	1.8

## Design

Displacement	cm <sup>3</sup>	3.00
Oil quantity (type)	cm <sup>3</sup>	150 (polyolester)
Maximum refrigerant charge	g	120
Free gas volume in compressor	cm <sup>3</sup>	870
Weight - Compressor/Electronic unit	kg	4.3/0.25

## Dimensions


Height	mm	A	137
		B	135
		B1	128
		B2	73
Suction connector	location/I.D. mm   angle	C	6.2   41.5°
	material   comment		Cu-plated steel   Al cap
Process connector	location/I.D. mm   angle	D	6.2   45°
	material   comment		Cu-plated steel   Al cap
Discharge connector	location/I.D. mm   angle	E	5.0   21°
	material   comment		Cu-plated steel   Al cap
Connector tolerance	I.D. mm		±0.09, on 5.0 +0.12/+0.20
Remarks:			

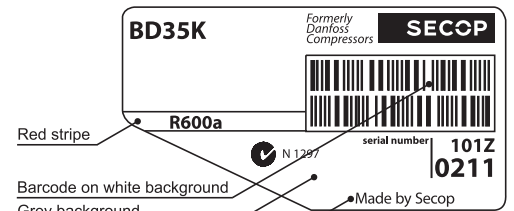

Red stripe  
Barcode on white background  
Grey background  
Country of origin or manufacturer



- S = Static cooling normally sufficient
- O = Oil cooling
- F<sub>1</sub> = Fan cooling 1.5 m/s  
(compressor compartment temperature equal to ambient temperature)
- F<sub>2</sub> = Fan cooling 3.0 m/s necessary
- SG = Suction gas cooling normally sufficient
- = not applicable in this area

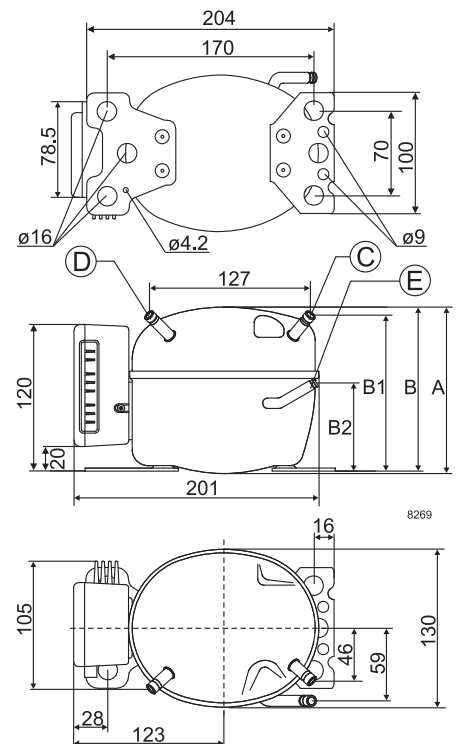

**Capacity (EN 12900 Household/CECOMAF) 12V DC, static cooling watt**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	13.2	21.0	23.8	29.7	39.6	51.0	64.0	79.1	96.3	105	116	
2,500	16.8	25.5	28.8	35.6	47.5	61.3	77.5	96.2	118	128		
3,000	20.7	30.5	34.3	42.3	56.3	72.9	92.4	115				
3,500	24.9	36.0	40.2	49.3	65.1	83.8	106					

**Capacity (ASHRAE LBP) 12V DC, static cooling watt**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	16.0	25.5	29.0	36.1	48.2	62.1	78.0	96.4	118	128	142	
2,500	20.4	31.0	35.0	43.4	57.8	74.7	94.4	117	144	157		
3,000	25.2	37.1	41.7	51.4	68.5	88.7	113	140				
3,500	30.3	43.8	49.0	59.9	79.2	102	129					

**Power consumption 12V DC, static cooling watt**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	18.5	22.5	23.9	26.4	30.3	34.2	38.0	41.8	45.7	47.4	49.6	
2,500	23.8	28.5	30.0	32.9	37.2	41.5	45.8	50.2	54.9	57.1		
3,000	29.5	35.9	38.0	41.8	47.4	52.9	58.6	64.6				
3,500	35.1	42.7	45.2	49.7	56.4	63.0	69.7					

**Current consumption (for 24V applications the following must be halved) A**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	1.54	1.88	1.99	2.20	2.53	2.85	3.17	3.48	3.81	3.95	4.13	
2,500	1.98	2.37	2.50	2.75	3.10	3.46	3.82	4.19	4.58	4.76		
3,000	2.46	2.99	3.16	3.48	3.95	4.41	4.88	5.38				
3,500	2.93	3.56	3.76	4.15	4.70	5.25	5.81					


**COP (EN 12900 Household/CECOMAF) W/W**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	0.71	0.93	1.00	1.12	1.31	1.49	1.69	1.89	2.11	2.21	2.34	
2,500	0.71	0.90	0.96	1.08	1.28	1.48	1.69	1.92	2.15	2.25		
3,000	0.70	0.85	0.90	1.01	1.19	1.38	1.58	1.78				
3,500	0.71	0.84	0.89	0.99	1.15	1.33	1.52					

**COP (ASHRAE LBP) 12V DC, static cooling W/W**

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	7.2	10	15
2,000	0.87	1.13	1.21	1.37	1.59	1.82	2.05	2.31	2.57	2.70	2.86	
2,500	0.86	1.09	1.17	1.32	1.55	1.80	2.06	2.34	2.62	2.74		
3,000	0.85	1.03	1.10	1.23	1.44	1.68	1.92	2.17				
3,500	0.86	1.03	1.08	1.21	1.40	1.62	1.85					

Test conditions	EN 12900/CECOMAF	ASHRAE LBP
Condensing temperature	55°C	54.4°C
Ambient temperature	32°C	32°C
Suction gas temperature	32°C	32°C
Liquid temperature	no subcooling	32°C

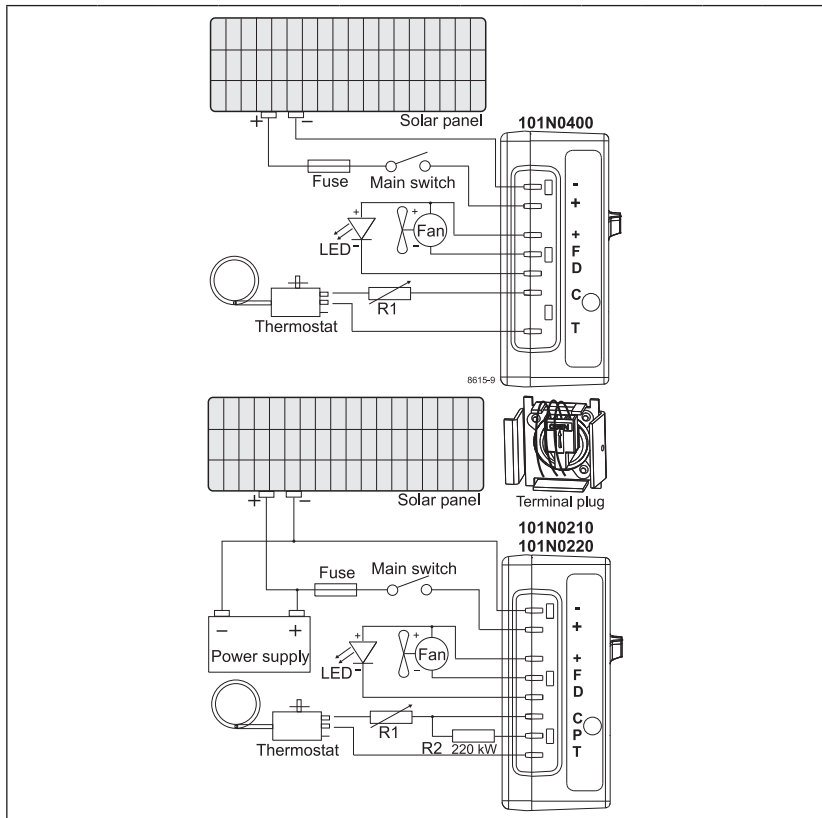

**Operational errors shown by LED (optional)**

Error code	Error type
5	<b>Thermal cut-out of electronic unit</b> (If the refrigeration system has been too heavily loaded, or if the ambient temperature is high, the electronic unit will run too hot).
4	<b>Minimum motor speed error</b> (If the refrigeration system is too heavily loaded, the motor cannot maintain minimum speed at approximately 1,850 rpm).
3	<b>Motor start error</b> (The rotor is blocked or the differential pressure in the refrigeration system is too high (>5 bar)).
2	<b>Fan over-current cut-out</b> (The fan loads the electronic unit with more than 1A <sub>peak</sub> ).
1	<b>Battery protection cut-out</b> (The voltage is outside the cut-out setting).

**Compressor speed**

Electronit unit	Resistor (R1) [Ω]	Motor speed [rpm]	Control circuit current [mA]
101N0210	0	2,000	5
	277	2,500	4
	692	3,000	3
101N0220	1523	3,500	2
	0	AEO	6
101N0400 with AEO	173	2,000	5
	450	2,500	4
	865	3,000	3
	1696	3,500	2


In AEO (Adaptive Energy Optimizing) speed mode the BD compressor will always adapt its speed to the actual cooling demand.

**Wire Dimensions DC**

Size	Cross section [mm²]	AWG [Gauge]	Max. length* 12V operation		Max. length* 24V operation	
			[m]	[ft.]	[m]	[ft.]
2.5	12	12	2.5	8	5	16
4	12	10	4	13	8	26
6	10	8	6	20	12	39
10	8	6	10	33	20	66

\*Length between battery and electronic unit

Accessories for BD35K	Code number
Bolt joint for one comp.	Ø:16 mm 118-1917
Bolt joint in quantities	Ø:16 mm 118-1918
Snap-on in quantities	Ø:16 mm 118-1919
Remote kit (without cable)	105N9210

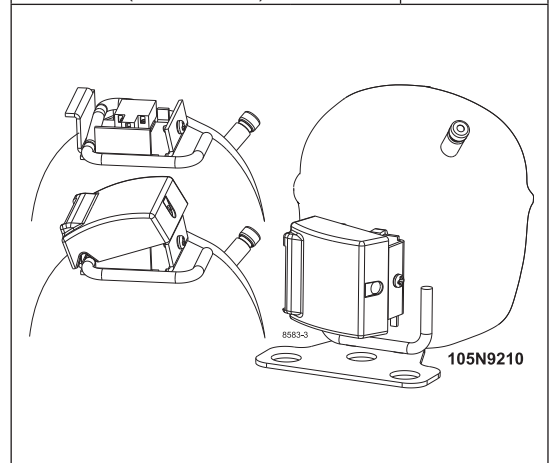

Automobile fuse DIN 7258	12V: 15A 24V: 7.5 A	Not deliverable from Secop
Main switch	min. 20A	

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.