

Fact Sheet: VLT® Enclosed Drives

# Extended functionality and real LHD for high-performance operation

VLT® Enclosed Drives have been designed to meet the most demanding requirements for flexibility, robustness, compactness and service-friendliness, making them a smart choice for diverse applications. They are ideal for low harmonic drive (LHD) usage, with outstanding harmonic mitigation performance.



**VLT® Enclosed Drives** are configurable with input/output filters, control and enclosure options to meet practically all requirements of the application, eliminating the need for an extra enclosure.

Selectable input/output filters ensure highest quality of the voltage on motor terminals, as well as the lowest harmonics content of mains currents – TDD <3% and it is a best choice, when harmonics frequencies above 2 kHz in the power supply network is a concern to fulfil the IEC 61000-2-4 requirements for harmonics up to 9 kHz.

### Back-channel cooling

A unique ducted back-channel passes cooling air over heat sinks with minimal air passing through the electronics area. There is an IP54/Type 12 seal between the back-channel cooling duct and the electronics area of the VLT® drive. This allows 90% of the heat losses to be exhausted directly outside of the enclosure, improving reliability and prolonging life by dramatically reducing temperature rise and contamination of the electronic components. Input/output filters also use the IP54/ Type 12 -rated back-channel for cooling.

## <3%

Total harmonic distortion, even up to 9 kHz

## Real LHD

### Available for enclosure sizes D and E

- VLT® AutomationDrive FC 302
- VLT® AQUA Drive FC 202
- VLT® HVAC Drive FC 102
- VLT® Refrigeration Drive FC 103


### Protection ratings

- IP21 (Type 1)
- IP54 (Type 12)

### Supply voltage and power ranges

- 380-480/500 V.....90 kW-500 kW
- 525-690 V.....90 kW-710 kW with 150% overload

Feature	Benefit
<b>Built-in options</b>	Eliminate the need for an extra cabinet when options are required. Save cost on equipment and reduce space requirements.
<b>Back-channel cooling</b>	Reduce the scale of air conditioning required for the room, and even reduce the room size, for savings in up-front cost and operating expenses.
<b>Variable speed cooling fans</b>	Improve efficiency of the drive and reduce audible noise.
<b>VLT® drives family with common graphical LCP</b>	Know one drive, know them all. Save time and cost for training, service, ordering and spare parts logistics.
<b>Integrated selectable input/output filters</b>	Ensure highest quality of the voltage on motor terminals, as well as the lowest harmonics content of the mains currents.
<b>Door-mounted control compartment</b>	Safe accessibility to control terminals, also during operation of the drive.

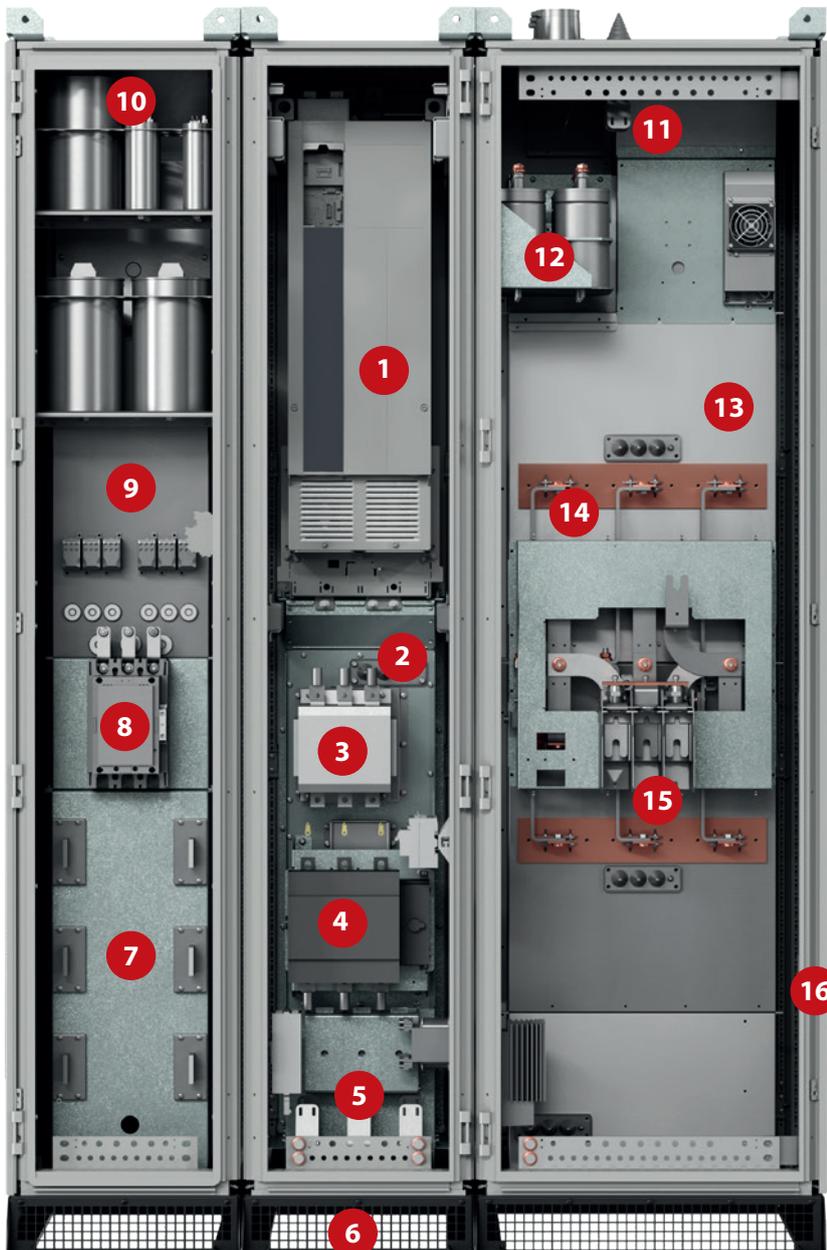

- 1 VLT® drive:** Drives with enclosure size D and E with selectable control options cards.
- 2 Back-channel cooling assembly** ensures utilization of the drive's back-channel cooling concept in the cabinet.
- 3 Mains contactor** is a selectable mains power option.
- 4 Mains switch disconnect** is a selectable mains power option.
- 5 Bottom entry establishment** ensures IP54/NEMA12 connections to the power supply.
- 6 Plinth** is available as an option in 100 mm, 200 mm, and 400 mm sizes.
- 7 Magnetics of the input filter assembly** ensures the low harmonics content of mains currents - TDD<3%.
- 8 Contactor** to control the harmonics filter of the drive.
- 9 Back-channel cooling assembly** for input harmonic filter ensures efficient cooling of magnetics.
- 10 Capacitors assembly** of the input harmonics filter.
- 11 Top-exit establishment** ensures IP54/NEMA12 connections of motor cables from the top.
- 12 Capacitors assembly** of the output sine-wave filter.
- 13 Back-channel cooling assembly** for magnetics of the output sine-wave filter.
- 14 Sine-wave filter magnetics** of the output filter, as a selectable power option.
- 15 Motor connection terminals** are placed in the sine-wave filter cabinet of the enclosed drive.
- 16 Enclosed drive cabinet** utilizes Rittal TS8 buying system.

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without consequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.