
WIRE COLOR SCHEME BLACK - LINE VOLTAGE RED - AC CONTROL WHITE - AC GROUNDED CIRCUIT CONDUCTOR
BLUE - DC CONTROL

TERMINAL IDENTIFICATION

X - DRIVE TERMINAL X - CUSTOMER TERMINAL

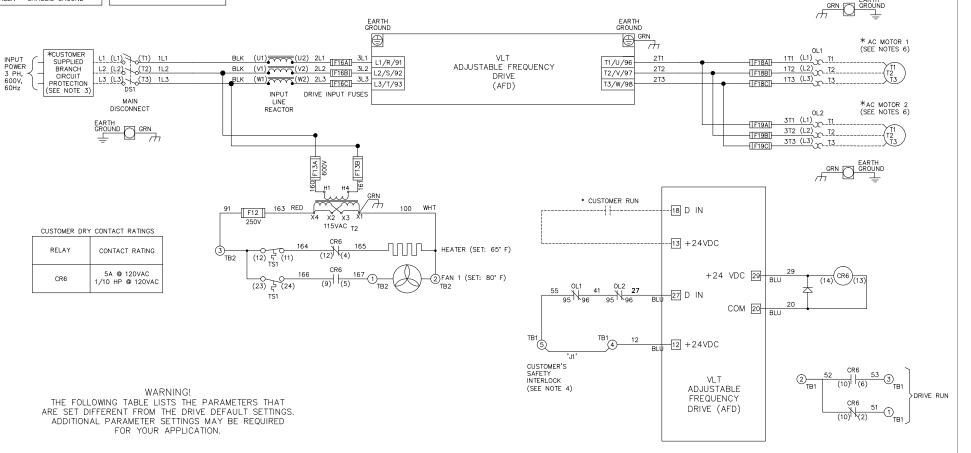

DRIVE PARAMETER SETTINGS

PARAMETER #	NAME	SETTING	VALUE	
0-02	MOTOR SPEED UNIT	1	HZ	
0-03	REGIONAL SETTINGS	1	NORTH AMERICA	
1-03	TORQUE CHAR.	1	VARIABLE TORQUE	
5-02	TERMINAL 29 TYPE	1	OUTPUT	
5-31	TERMINAL 29	5	RUNNING	
14-20	RESET MODE	13	INFINITE AUTO REST	

NOTES:

- 1. * INDICATES COMPONENTS NOT SUPPLIED BY MANUFACTURER.
- REFER TO THE INSTALLATION AND OPERATION MANUAL FOR DRIVE FUNCTIONS AND PARAMETER SETTINGS.
- BRANCH CIRCUIT PROTECTION, INPUT POWER AND MOTOR WIRING MUST BE SELECTED IN ACCORDANCE WITH THE N.E.C., ANY APPLICATION LOCAL CODES AND THE LOAD CURRENT RATING.
 - REPLACE JUMPER 'J1' WITH NORMALLY CLOSED SAFETY INTERLOCK CONTACT AS NECESSARY.
- 5. PANEL MAY REQUIRE DERATING, CONSULT DRIVE MANUAL OR FACTORY FOR FOLLOWING CONDITIONS:
- 5.1. HIGHER SWITCHING FREQUENCY THAN DRIVE DEFAULT 5.2. HIGHER THAN PANEL LISTED AMBIENT TEMPERATURES
- ELEVATION ABOVE 3300 FEET (1000 METERS)
- LONG MOTOR LEAD LENGTHS
- 6. WHEN MOTOR OVERLOADS SIZES ARE DIFFERENT, MOTOR 1 WILL BE THE LARGER OF THE TWO MOTORS

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF DANFOSS DRIVES.	O TI	NAME	NEMA 3R,600V,NB		- Les
A SP10119 11/10 IT IS LOANED BY DANFOSS DRIVES SUBJECT TO THE CONDITIONS THAT IT AND THE INFORMATION EMBODIED THEREIN SHALL BE USED ONLY FOR RECORD AND REFERENCE PURPOSES. SHALL NOT BE USED OR CAUSED TO BE USED	DIM	,MAIN DISC, DRIVE FUSE ,IR,DUAL MOTOR,1 FAN			Janjuos
	APR S. T. (MODEL ,,, -	,IN,DOAL MOTOR,T TA	CIZE A DWC 4 O	
REV ECN DATE TO ANYONE WITHOUT THE DIRECT WRITTEN PERMISSION OF DANFOSS DRIVES AND SHALL BE RETURNED UPON REQUEST.	D/M	VL1	PAGE <u>1</u> OF <u>1</u>	SIZE A NO. 1 8;	DBU9U4