

|     |         |       |  |  |                    |     |   |             |  |                  |
|-----|---------|-------|--|--|--------------------|-----|---|-------------|--|------------------|
|     |         |       | -NOTICE-   |  | DRN JNW<br>2/14/07 |     | NAME 208 VOLT,2C,CB<br>,DRIVE FUSE,ECB,FRAME C2N12<br>,REACTOR,DUAL MTR |             | THE TRANE COMPANY<br>A DIVISION OF<br>AMERICAN STANDARD INC. |                  |
| A   | SP08061 | 10/08 | THIS DRAWING IS PROPRIETARY AND SHALL NOT<br>BE COPIED OR ITS CONTENTS DISCLOSED TO<br>OUTSIDE PARTIES WITHOUT THE WRITTEN<br>CONSENT OF THE TRANE COMPANY |  |                    | APR | MODEL   | PAGE 1 OF 2 | SIZE A   | DWG NO. 174U6370 |
| REV | ECN     | DATE  |  |  |                    |     |   |             |  |                  |

|     |         |       |
|-----|---------|-------|
| REV | ECN     | DATE  |
| A   | SP08066 | 10/08 |

-NOTICE-  
THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF THE TRANE COMPANY

DRN JUNW  
2/14/07  
APR

NAME 208 VOLT, 2C, CB  
, DRIVE FUSE, ECB, FRAME C2N12  
, REACTOR, DUAL MTR


MODEL

PAGE 2 OF 2

SIZE A

DWG NO. 174U6370

CUSTOMER CONNECTIONS X56, X57, X59  
CLASS 2 POWER SOURCE  
REQUIRED FOR FIELD CONNECTION  
USE CLASS 1 CONDUCTORS  
CONDUCTOR SIZE 28-14 AWG

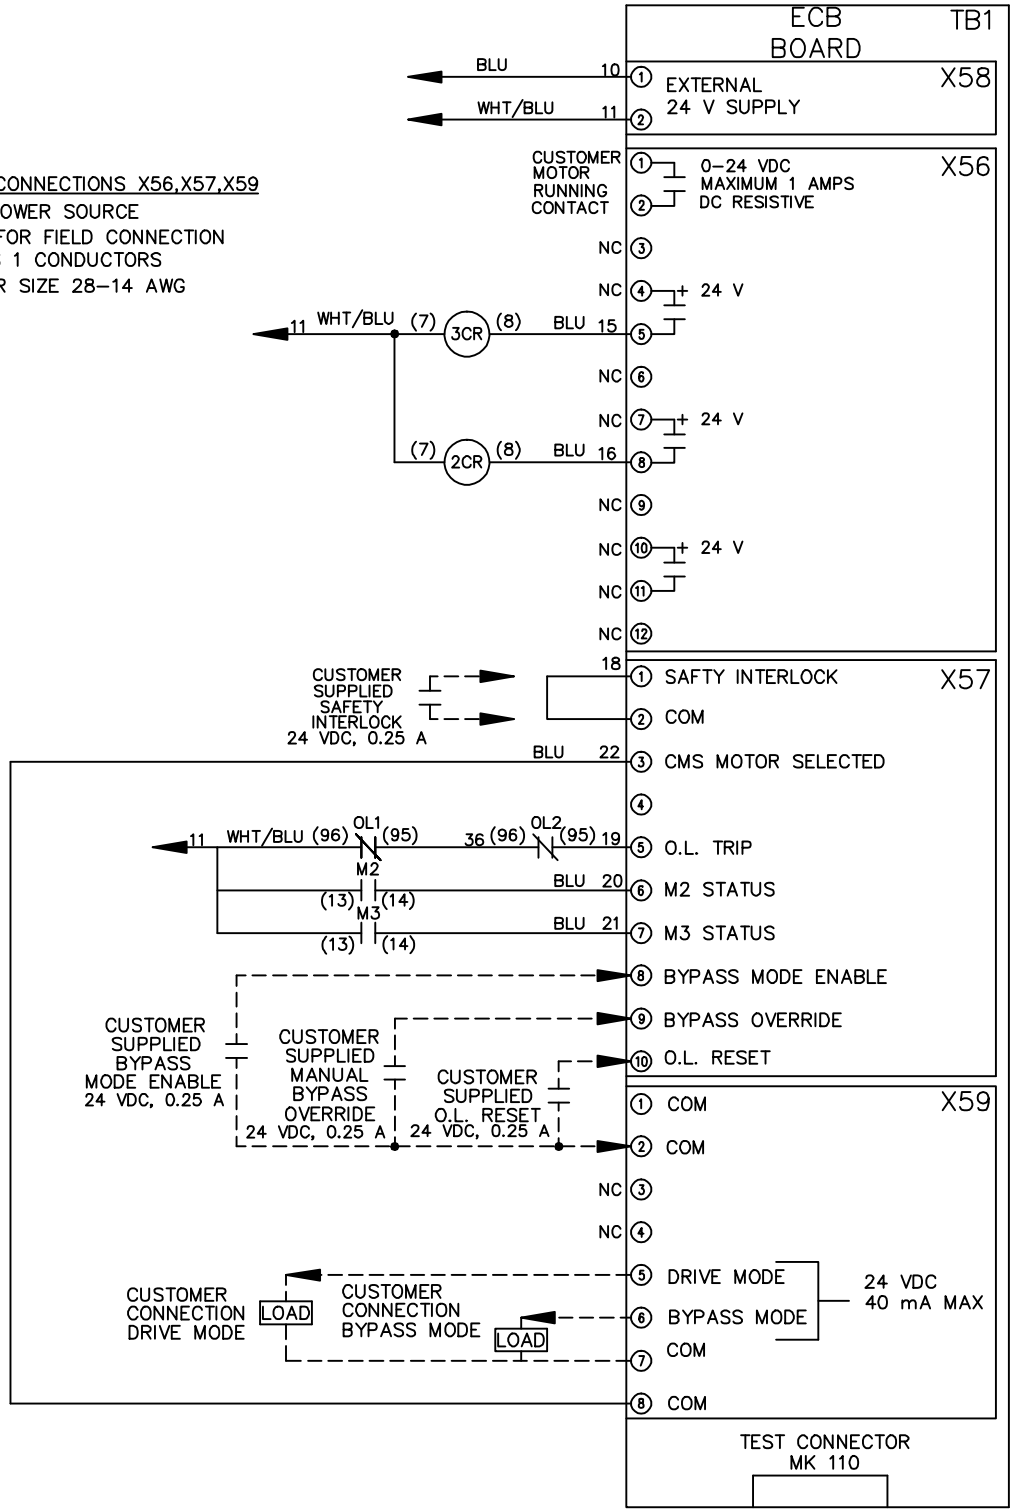

THE TRANE COMPANY  
A DIVISION OF  
AMERICAN STANDARD INC.