ENGINEERING TOMORROW



Fact Sheet

VACON® DCGuard™ Safe DC-grid selectivity



VACON® DCGUARD™* enables fast disconnection and full selectivity between DC grids.

Utilizing DC grids rather than AC grids enables power distribution with lower power losses. However, ensuring selectivity and limited short circuit energy requires more sophisticated protection devices. Danfoss Drives has therefore developed the VACON® DCGUARD™, a semiconductor protection device that can detect and cut off any DC faulty currents and isolate the faulty part of the system in microseconds.

Current range:

■ 465-800 VDC......3-4140 A ■ 640-1100 VDC.......4-3100 A

DC Grid 1

Short Circuit Protection VACON® DCGuard


DC Grid 2

Current cut off

Typical fuse clearance time >30 ms.

Feature	Benefit
Short circuit protection	Ensure correct system selectivity
Cutting off both + and - inside the same unit	No overvoltage spikes related to current cut off
Controlled voltage ramp up	Connect two different DC grids with voltage differences up to full DC voltage
Overload detection	Protection of transmission cables
Standard NXP hardware	Proven and well known products



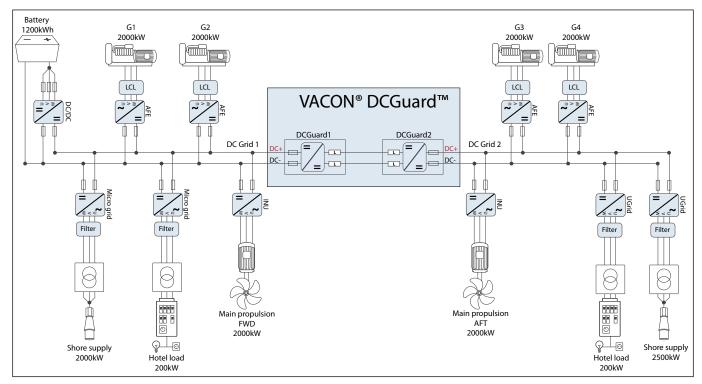

Example of hybrid system where VACON® DCGuard ensures the required system selectivity



Short circuit current cut-off snapshot

- --- DC- link voltage on feeding side. Negligible voltage dip on feeding side.
- --- DC current in connection cables. Current cut off in 100-150 μs.

Easy dimensioning

Rated VACON® DCGuard DC current = Rated VACON® NXP Inverter AC current.

This means that your primary dimensioning value is the required load through the VACON® DCGuardTM, meaning energy transfer from one side to another. It is as easy as that.

DCGuard™ is type approved by DNV-GL



Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

DKDD.PFP.906.A1.02 © Copyright Danfoss Drives | 2018.03