

Directional Control Valves Catalog 4 Way, 2 Position Hydraulic Piloted DV15-P5-24-05

OPERATION

The DV15-P5-24-05 is a normally-open, 5-ported piloted directional control valve, 2-position, 4-way, 15-size. It is shifted by applying a pilot pressure to port 5. In the normal position, flow is allowed between ports 3 and 2, and ports 4 to 1. During transition, the flow patterns remain the same. When the spool is fully shifted, all four ports are closed.



APPLICATIONS


Use this valve for applications including on-off control of uni-directional motors. The valve can be piloted with many 2-way valves including solenoid, sequence, relief or manual valves with the internal pilot drain orifice option. Alternatively, it can also be piloted with a 2-position, 3-way solenoid valve using the internal pilot drain plug option.

SPECIFICATIONS


Rated Pressure*	230 bar [3335 psi]
Rated Flow at 7 bar	70 l/min
[100 psi]	[18.4 US gal/min]
Maximum Rated Flow	80 l/min
	[21.1 US gal/min]
Minimum pilot pressure	2 bar [29 psi]
Weight	0.44 kg [0.95 lbs]
Cavity	NCS12/5

* Rated Pressure based on NFPA fatigue test standards (at 1 Million Cycles).

SCHEMATIC



PERFORMANCE CURVE

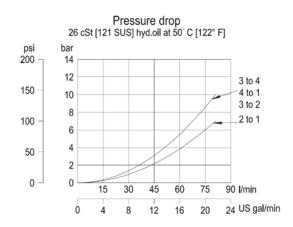




Directional Control Valves Catalog


4 Way, 2 Position Hydraulic Piloted DV15-P5-24-05


DIMENSIONS

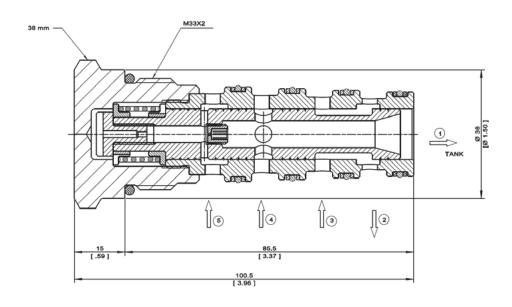


EXAMPLE CIRCUITS

Uni-directional Motor Control, Normally On



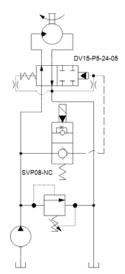

Piloted with 3-way valve and internal pilot drain plug option

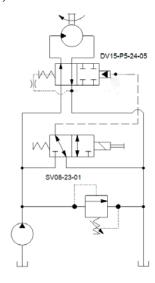

ORDERING INFORMATION

