

NOTE

1. * INDICATES COMPONENTS NOT SUPPLIED BY MANUFACTURER.

2. REFER TO THE INSTALLATION AND OPERATION MANUAL FOR DRIVE FUNCTIONS AND PARAMETER SETTINGS.
3. FEEDER CIRCUIT PROTECTION, INPUT POWER AND MOTOR WIRING MUST BE SELECTED IN ACCORDANCE WITH

THE N.E.C., ANY APPLICATION LOCAL CODES AND THE LOAD CURRENT RATING.

4. REPLACE JUMPER 'J1' WITH NORMALLY CLOSED SAFETY INTERLOCK CONTACT AS NECESSARY. CONTACT MUST BE RATED 1/4 HP @ 120VAC MINIMUM.

5. PANEL MAY REQUIRE DERATING, CONSULT DRIVE MANUAL OR FACTORY FOR FOLLOWING CONDITIONS:

5.1. HIGHER SWITCHING FREQUENCY THAN DRIVE DEFAULT

5.2. HIGHER THAN PANEL LISTED AMBIENT TEMPERATURES

5.3. ELEVATION ABOVE 3300 FEET (1000 METERS)

5.4. LONG MOTOR LEAD LENGTHS

6. WHEN MOTOR OVERLOADS SIZES ARE DIFFERENT, MOTOR 1 WILL BE THE LARGER OF THE TWO MOTORS

WARNING!
THE FOLLOWING TABLE LISTS THE PARAMETERS THAT
ARE SET DIFFERENT FROM THE DRIVE DEFAULT SETTINGS.
ADDITIONAL PARAMETER SETTINGS MAY BE REQUIRED
FOR YOUR APPLICATION.

DRIVE PARAMETER SETTINGS

PARAMETER #	NAME	SETTING	VALUE
0-02	MOTOR SPEED UNIT	1	HZ
0-03	REGIONAL SETTINGS	1	NORTH AMERICA
1-03	TORQUE CHAR.	1	VARIABLE TORQUE
5-02	TERMINAL 29 TYPE	1	OUTPUT
5-31	TERMINAL 29	5	RUNNING
14-20 RESET MODE		13	INFINITE AUTO REST

В			-NOTICE-	DRN	NAME		EMA 3R,600V,2C	THE TRANE COMPANY
А	SP10119	11/10	THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO	DIM			USE DISC, DRIVE FUSE IR,DUAL MOTOR,1 FAN	A DIVISION OF AMERICAN STANDARD INC.
DR	SP10076	09/10	OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF THE TRANE COMPANY	APR	MODEL	<u> </u>		
REV	ECN	DATE	CONSENT OF THE TRAINE COMPANY	DIM	WODEL	TR200	PAGE 1 OF 2 SIZE A NO. 1 S	35B3U4U

WIRE COLOR SCHEME BLACK - LINE VOLTAGE RED - AC CONTROL WHITE - AC GROUNDED

CIRCUIT CONDUCTOR
BLUE - DC CONTROL
GREEN - CHASSIS GROUND

TERMINAL IDENTIFICATION

X - DRIVE TERMINAL


X - CUSTOMER TERMINAL


CUSTOMER DRY CONTACT RATINGS

RELAY	CONTACT RATING
CR1, CR6	5A @ 120VAC 1/10 HP @ 120VAC
M2, M3	10A @ 120/240VAC



X INDICATES CONTACT CLOSED				
POSITION				
CONTACT	DRIVE	OFF	BYPASS	
13-14			Χ	
23-24	Χ			

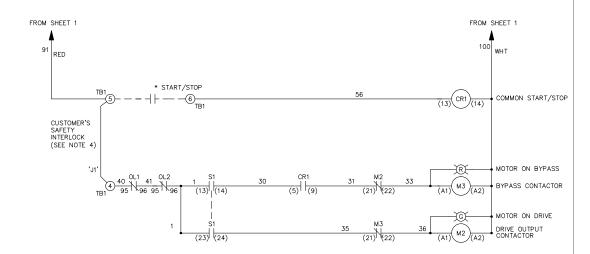

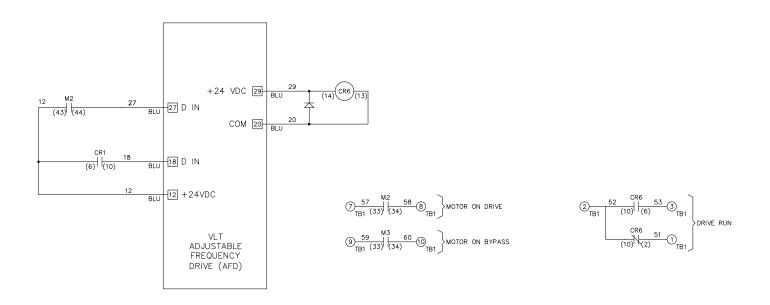

В		
Α	SP10119	11/10
DR	SP10076	09/10
REV	ECN	DATE

-NOTICE-
THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN
CONSENT OF THE TRANE COMPANY

DRN		NAME
	D TM	
	2 1111	
APR		
AL IX	$\cap T M$	MODEL
	D TM	

AME		NEMA	ЗR,	60	0V,2C	
	,MAIN	FUSE	DIS	C,	DRIVE	FUSE
	,3MB	1,IR,DL	JAL	M(DTOR,1	FAN

TR200

USE DISC, DRIVE R,DUAL MOTOR,1	A DIVISION OF AMERICAN STANDARD INC.	
page <u>2</u> of <u>2</u>	SIZE	DWG 185B3040

THE TRANE COMPANY