
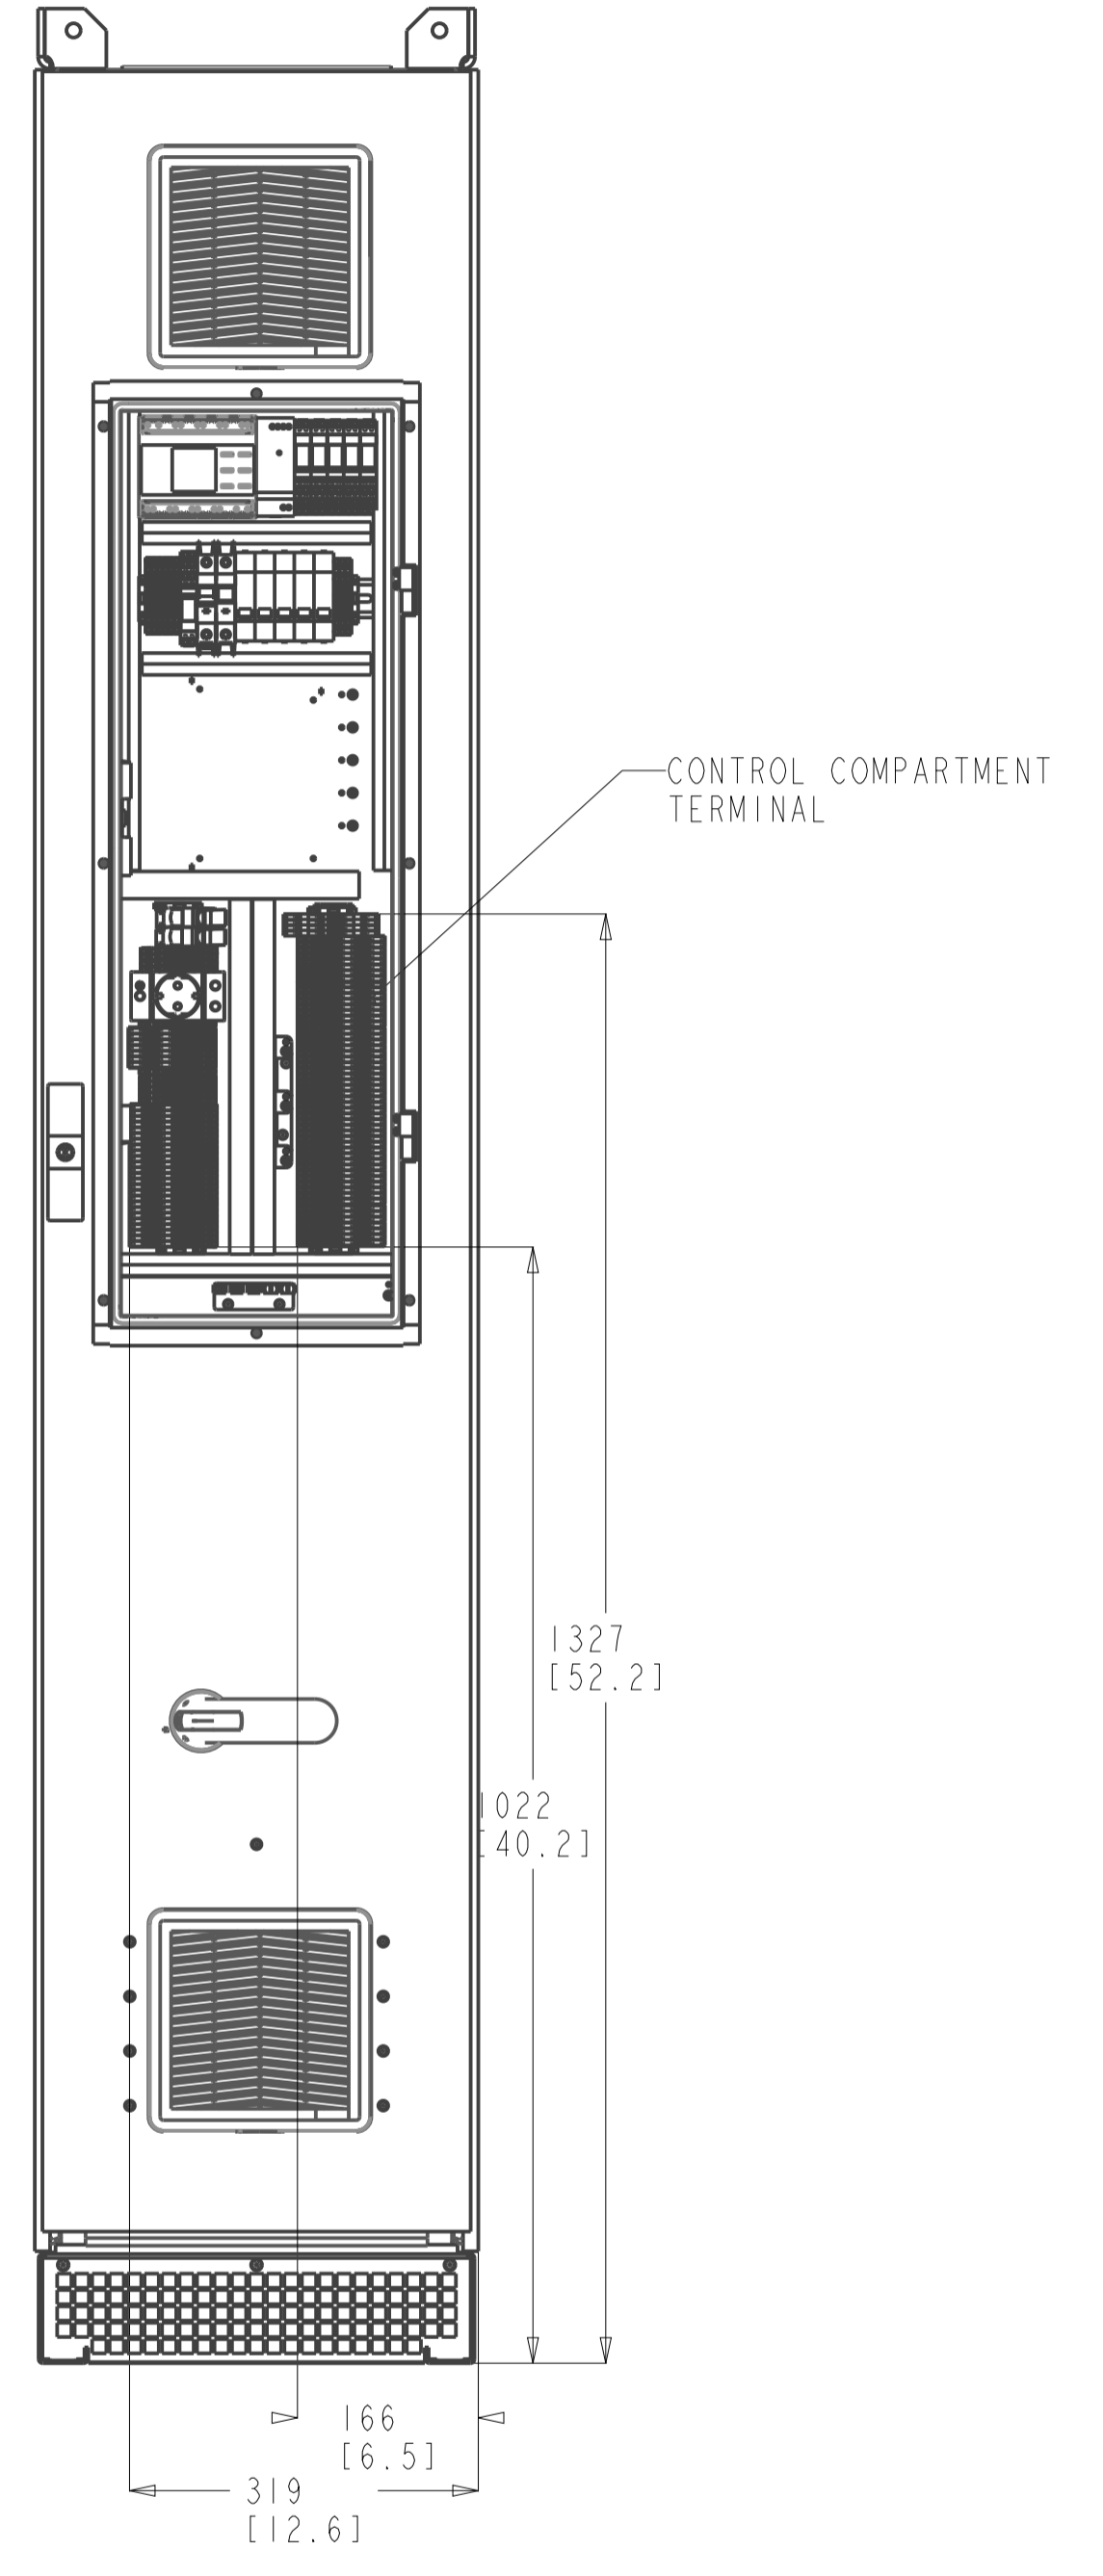
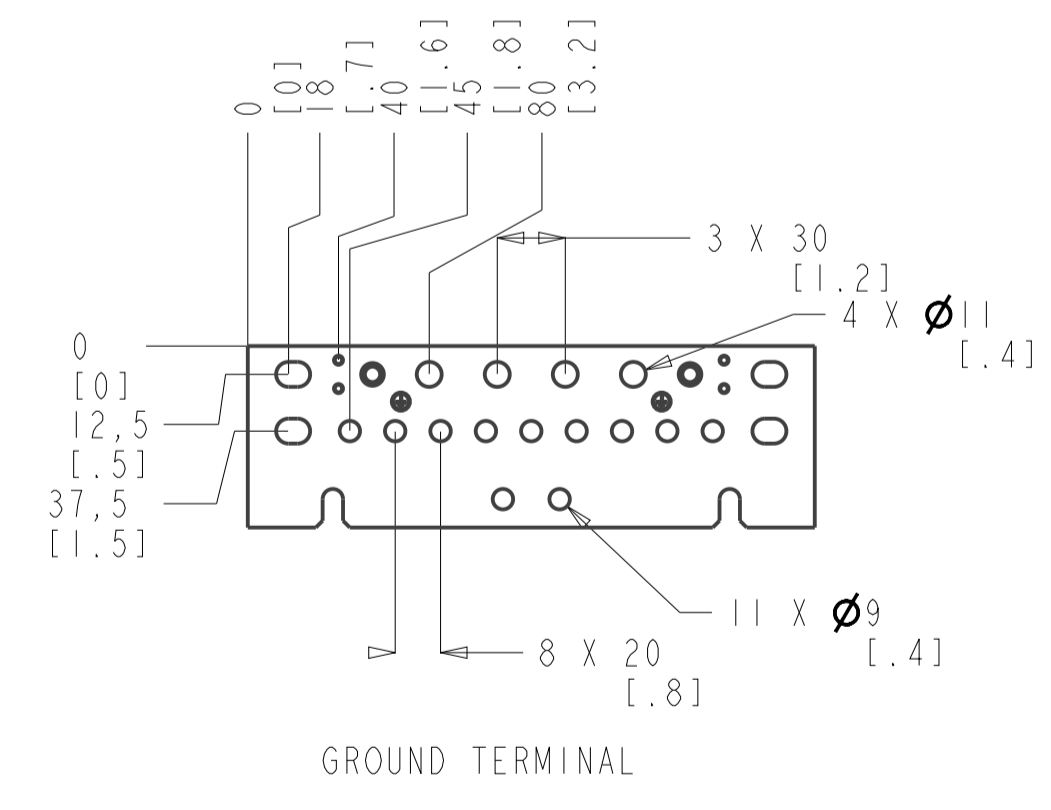
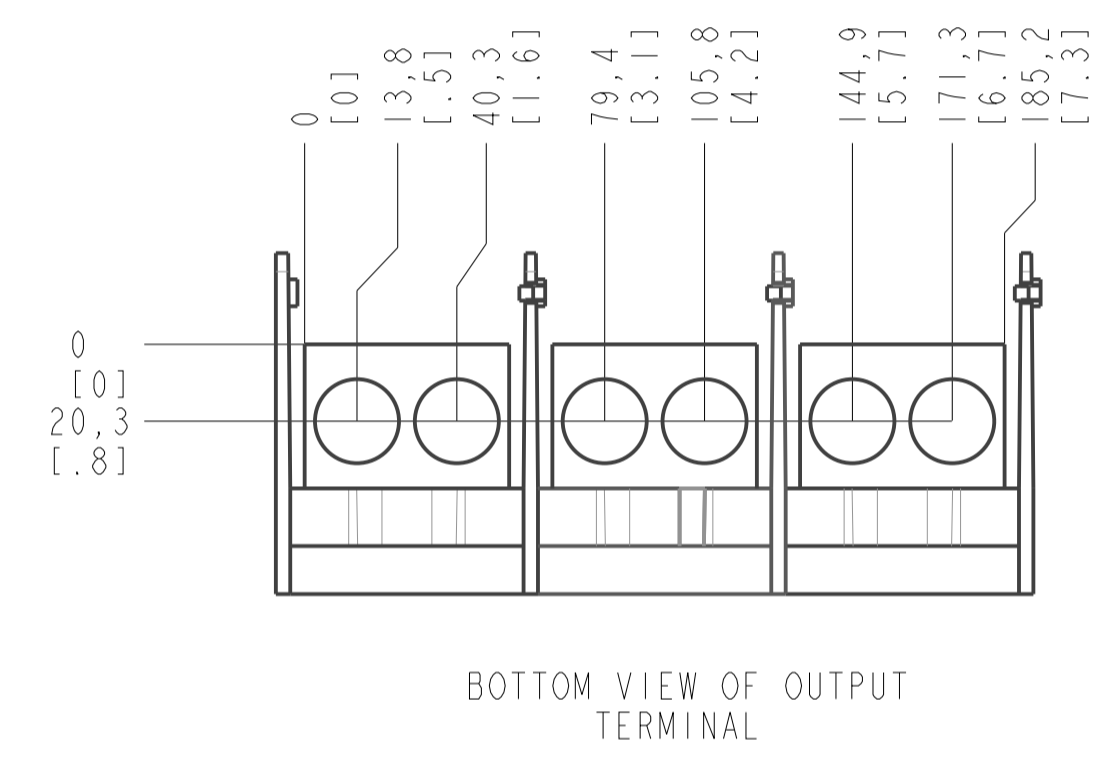
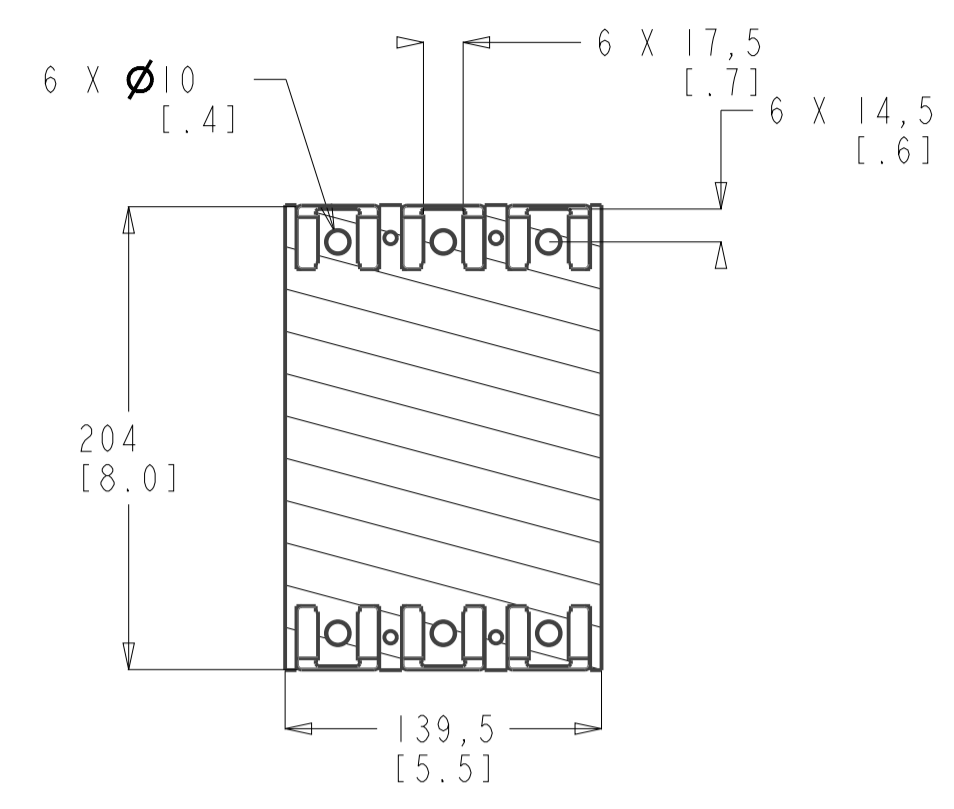


INTERNAL CABLES ARE HIDDEN  
IN THE DRAWING FOR BETTER CLARITY

CONTROL COMPARTMENT DOOR  
IS NOT SHOWN IN THE DRAWING  
FOR SHOWING INTERNAL COMPONENTS  
IN CONTROL COMPARTMENT

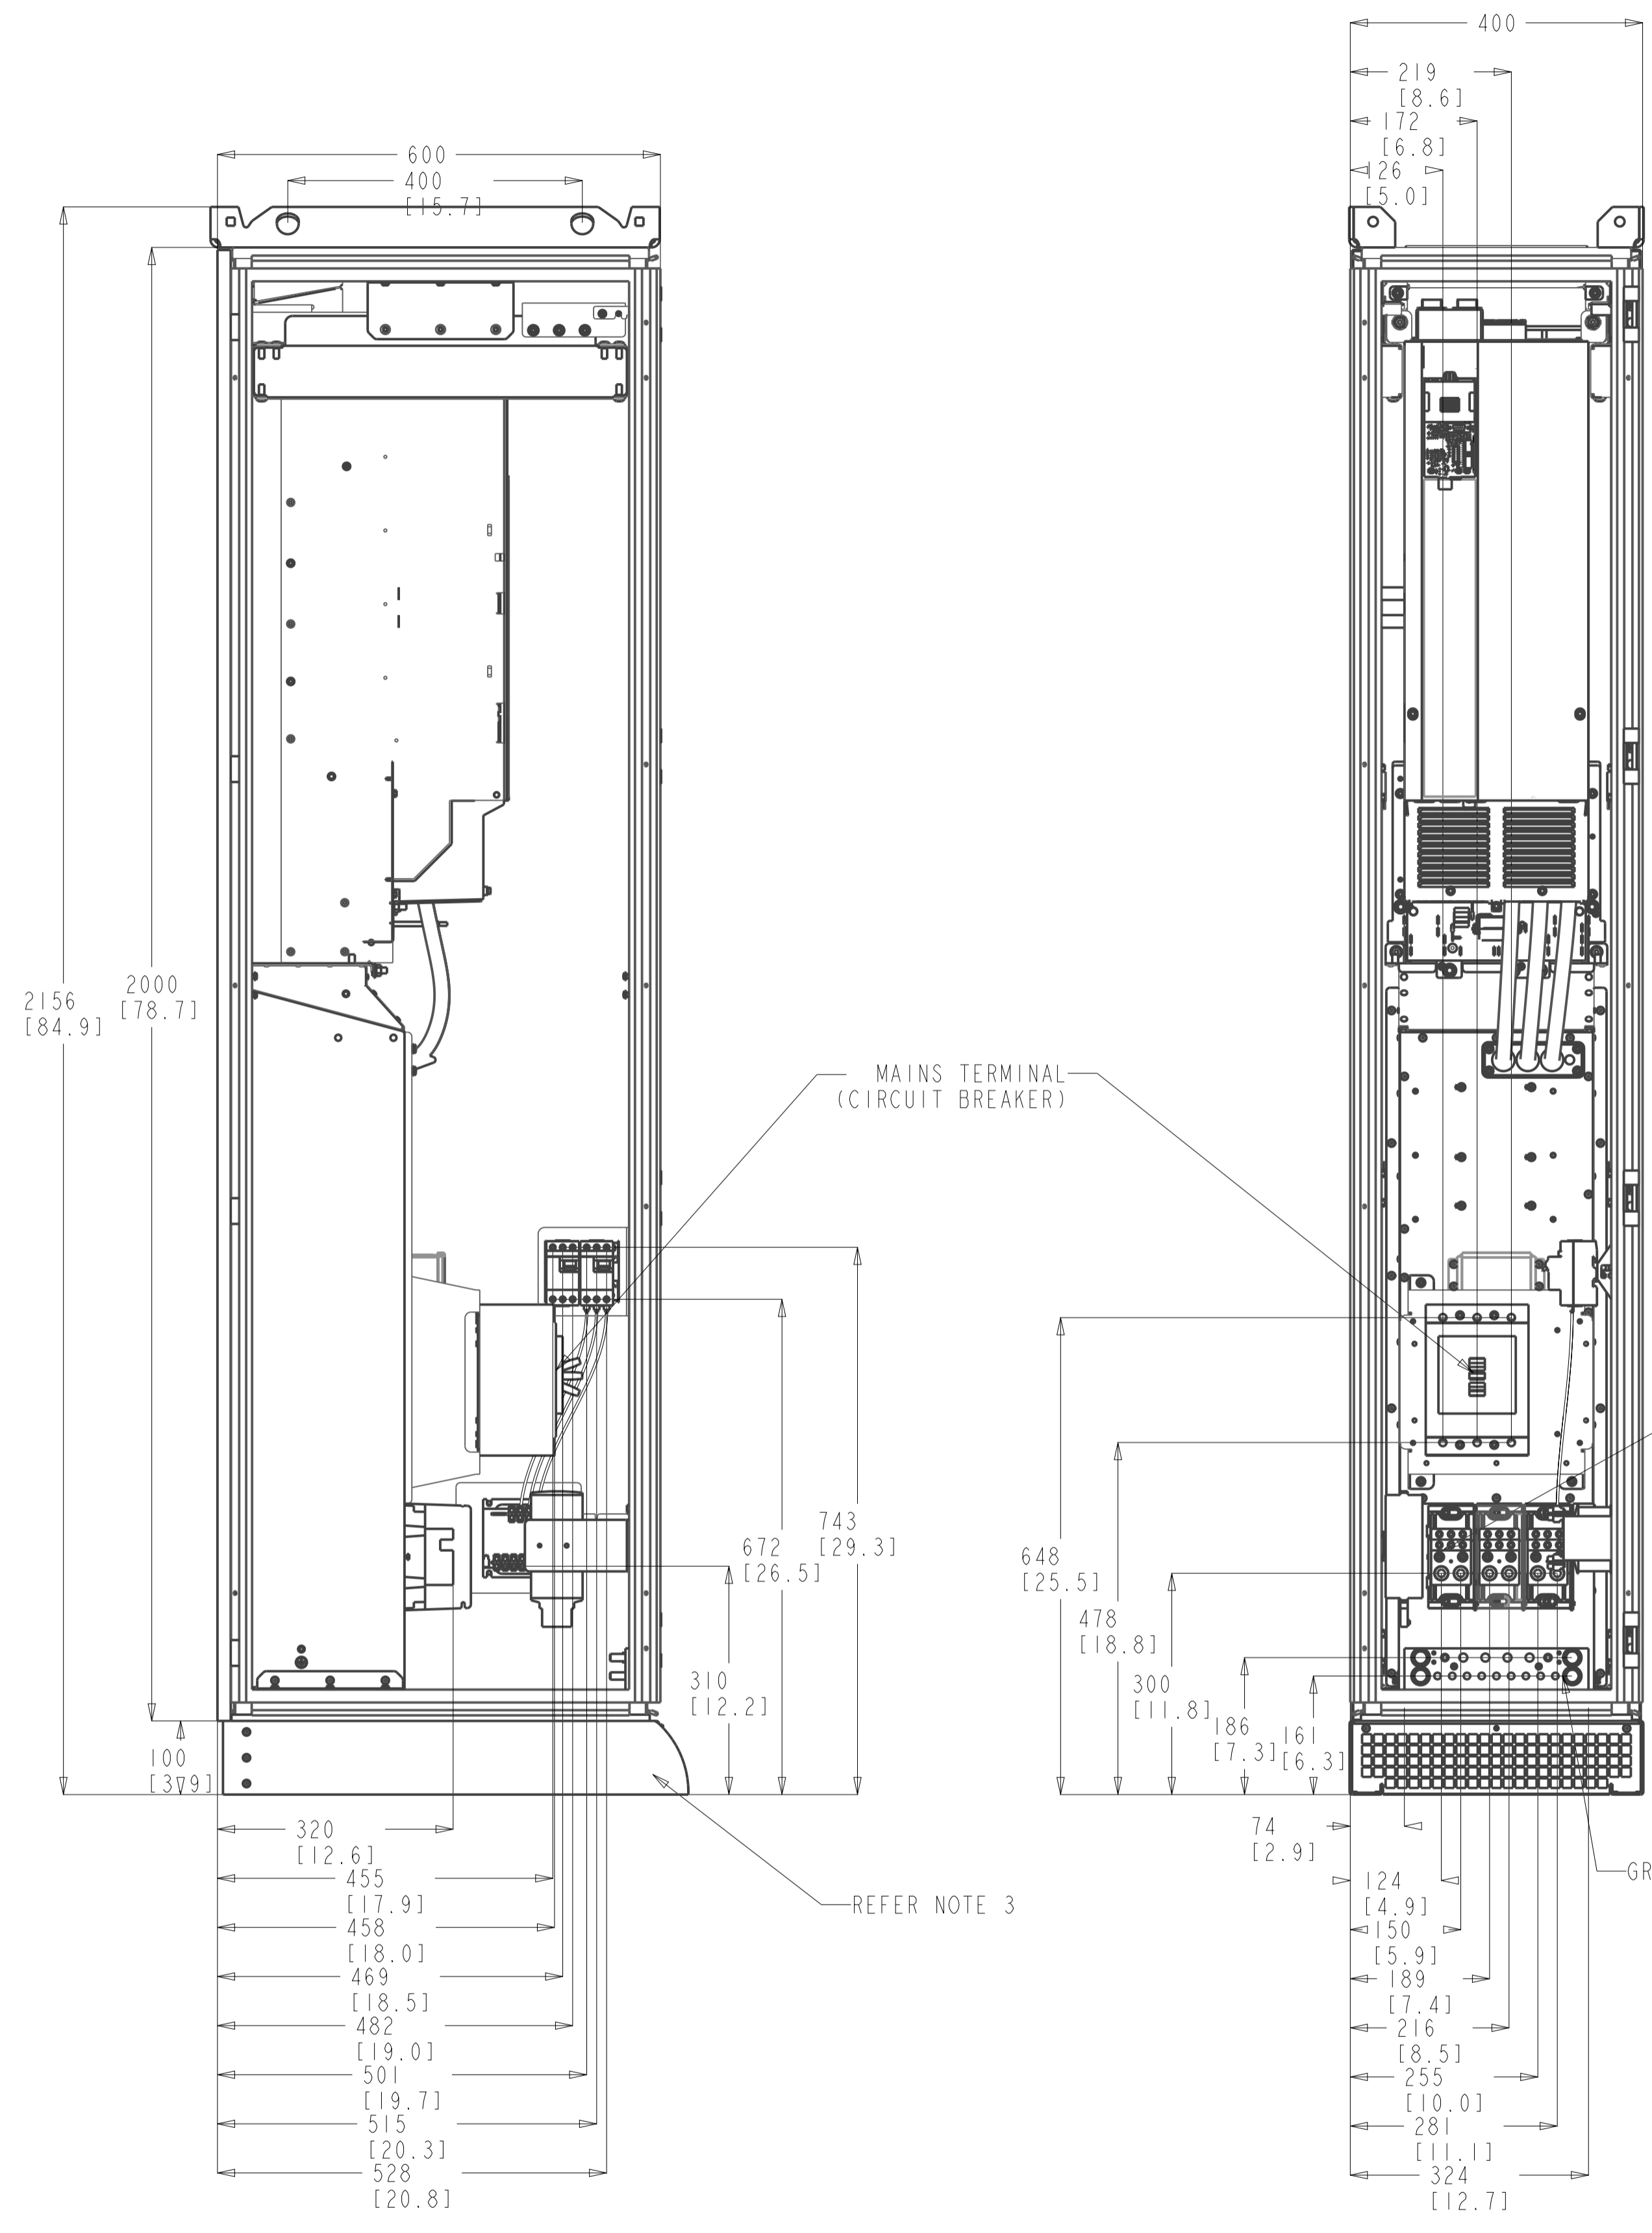


NOTE:  
1. BACK CHANNEL COOLING: BOTTOM IN TOP OUT  
2. CABLE FEED: BOTTOM ENTRY & BOTTOM OUT  
3. PLINTH HEIGHT CAN BE OF 100, 200, & 400mm HEIGHT.

NOTES:  
1. FOR FASTENER TORQUES, REFER TO 175R5600 CLASS A. UNLESS OTHERWISE SPECIFIED.


CRITICAL CHARACTERISTICS  
KEY CHARACTERISTICS  
INSPECTION  
MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED ±0.10 ±0.50 ±1.0		THIRD ANGLE PROJECTION	SCALE 0.150	SIZE A1	MATERIAL
PMW CONTROLLED DRAWING NOT VALID WITHOUT FROZEN DATE IN ID STAMP				FINISH	
CHANGED DESIGNED CHECKED	SABARISH Lour1			MAY-16-19 Feb-22-19	DESCRIPTION MCAD-PLV-D9H-IP54 -CB-DVDT-CM
CONFIDENTIAL: PROPERTY OF DANFOSS A/S NORBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.					REV. 002 1 OF 3

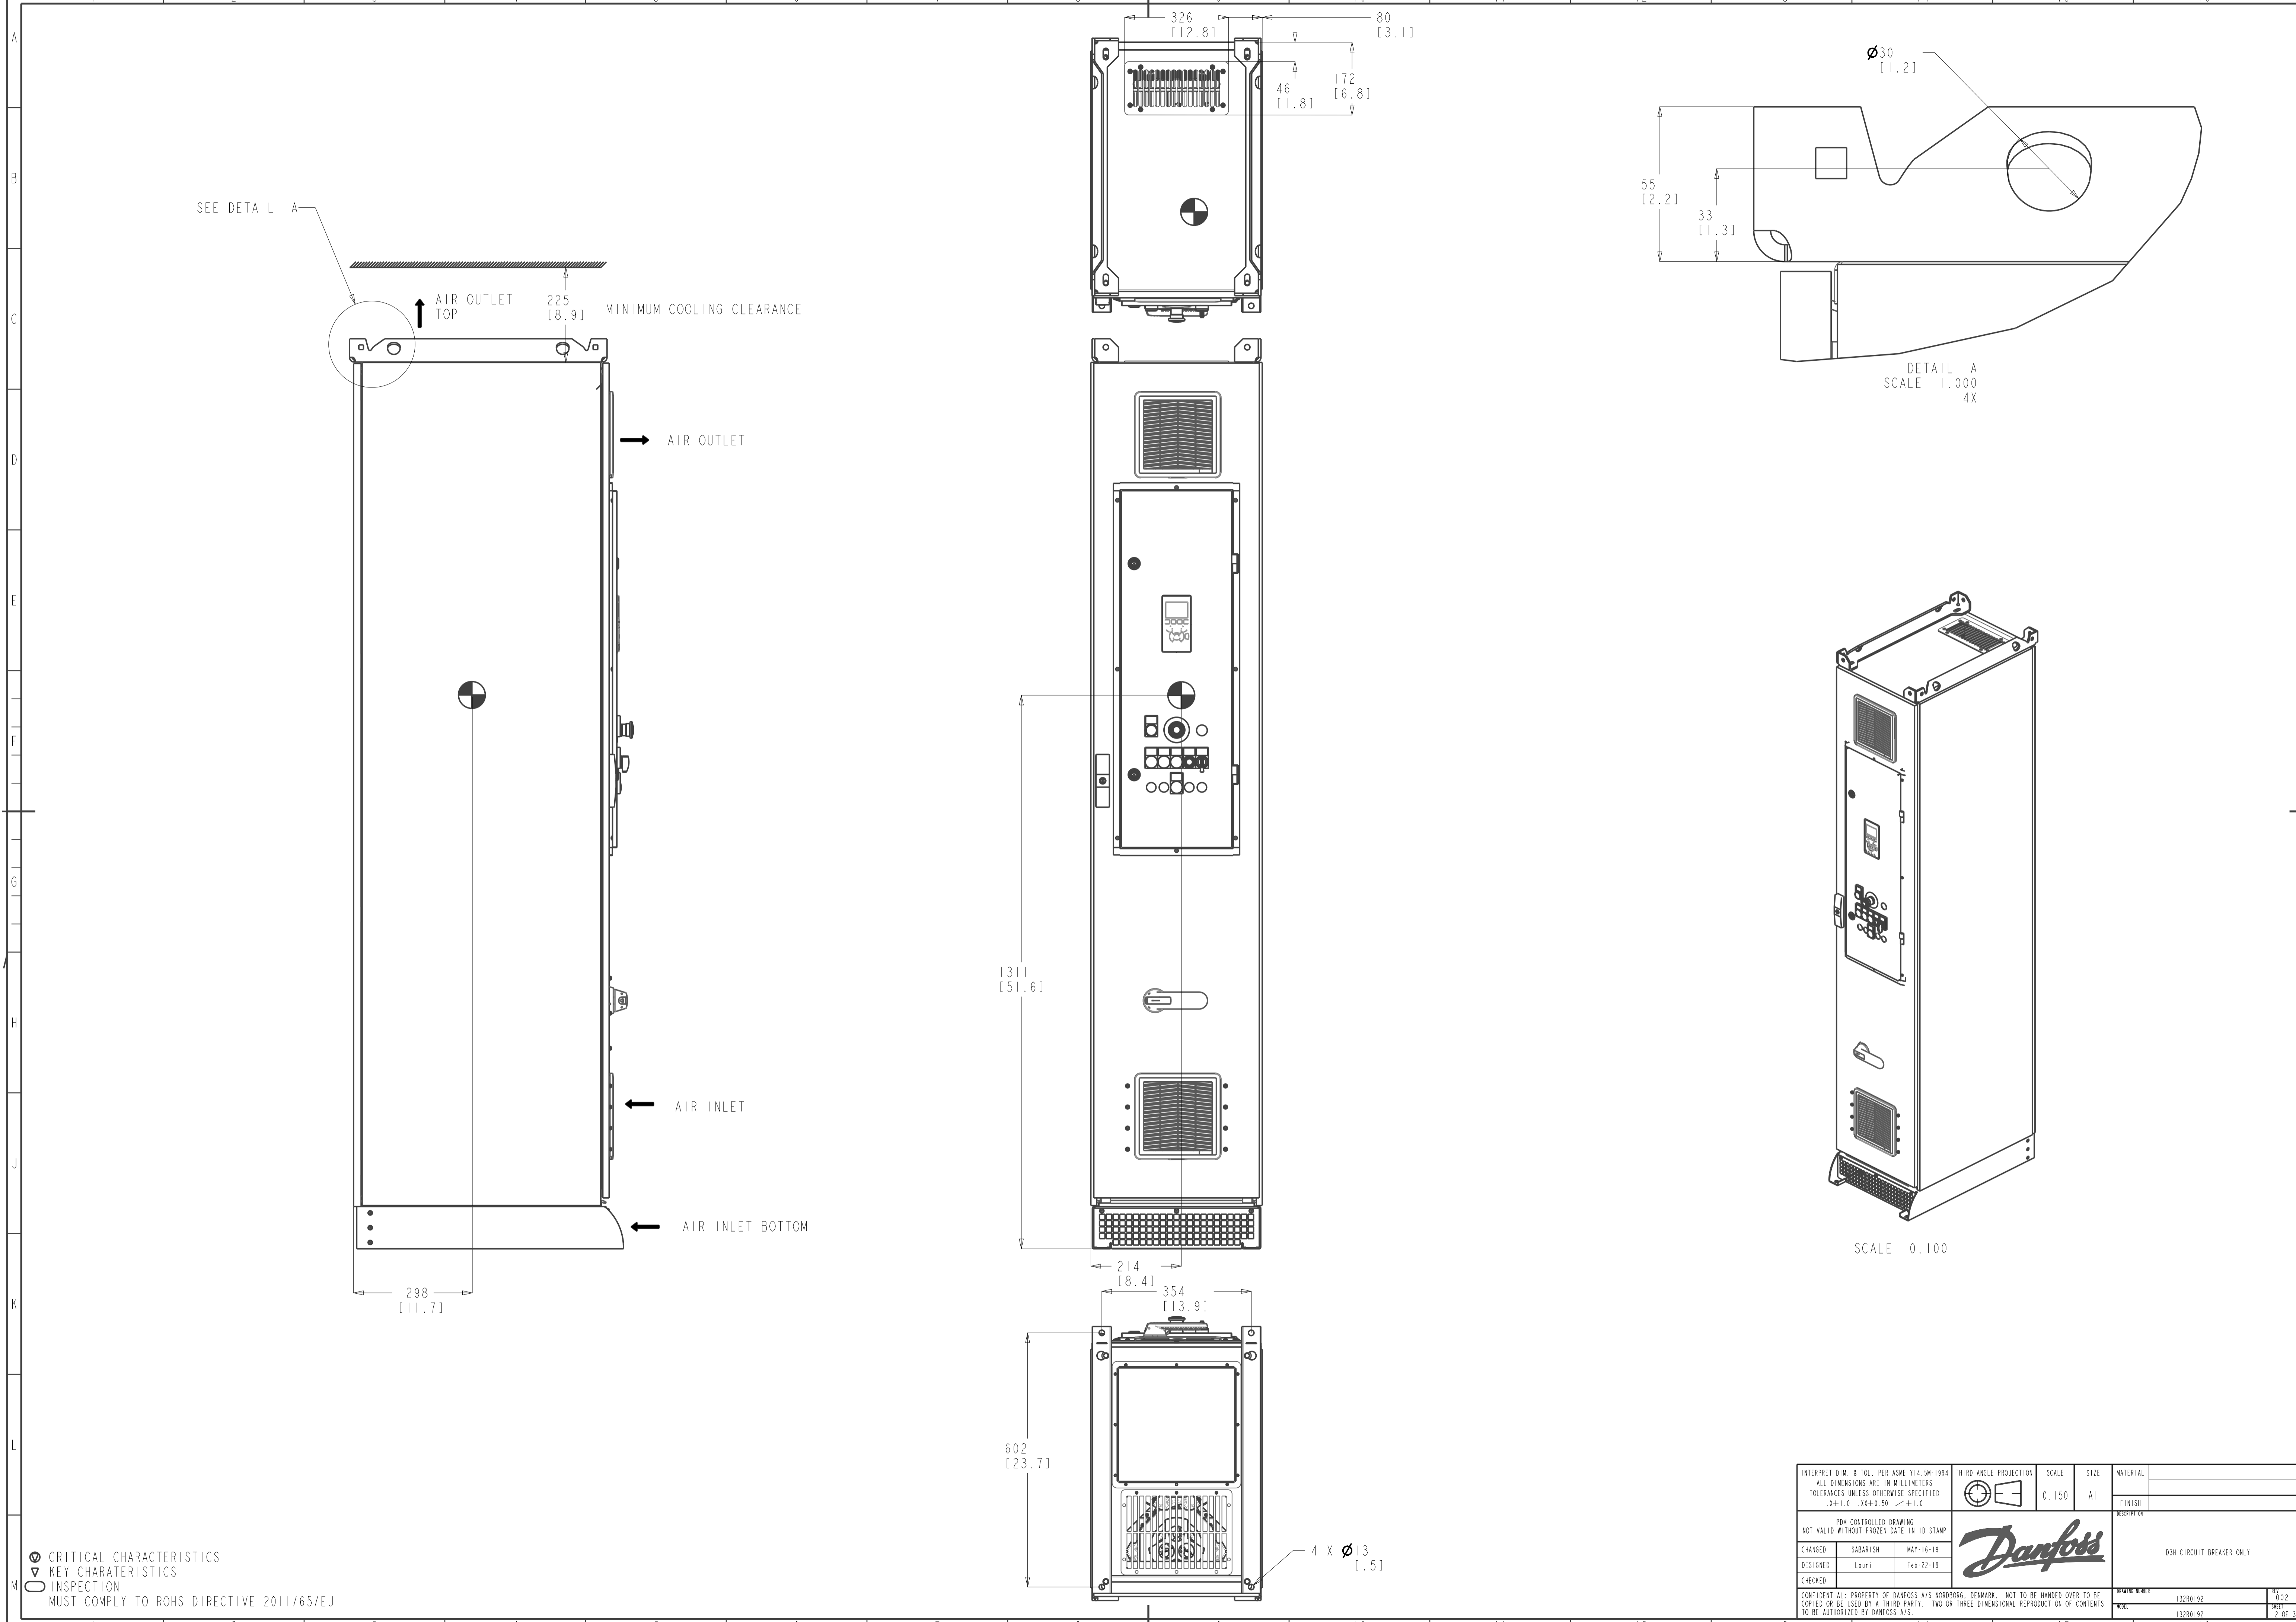

CRITICAL CHARACTERISTICS  
 KEY CHARACTERISTICS  
 INSPECTION  
 MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED ±1.0 ±0.50 ±1.0		THIRD ANGLE PROJECTION 	SCALE 0.150	SIZE A1	MATERIAL  		
PMW CONTROLLED DRAWING NOT VALID WITHOUT FROZEN DATE IN ID STAMP				03H CIRCUIT BREAKER ONLY			
CHANGED DESIGNED CHECKED	SABARISH Louv1					MAY-16-19 Feb-22-19	FINISH  
CONFIDENTIAL - PROPERTY OF DANFOSS A/S NORBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.						DRAWING NUMBER 132R0192	REV 002 SHEET 2 OF 3

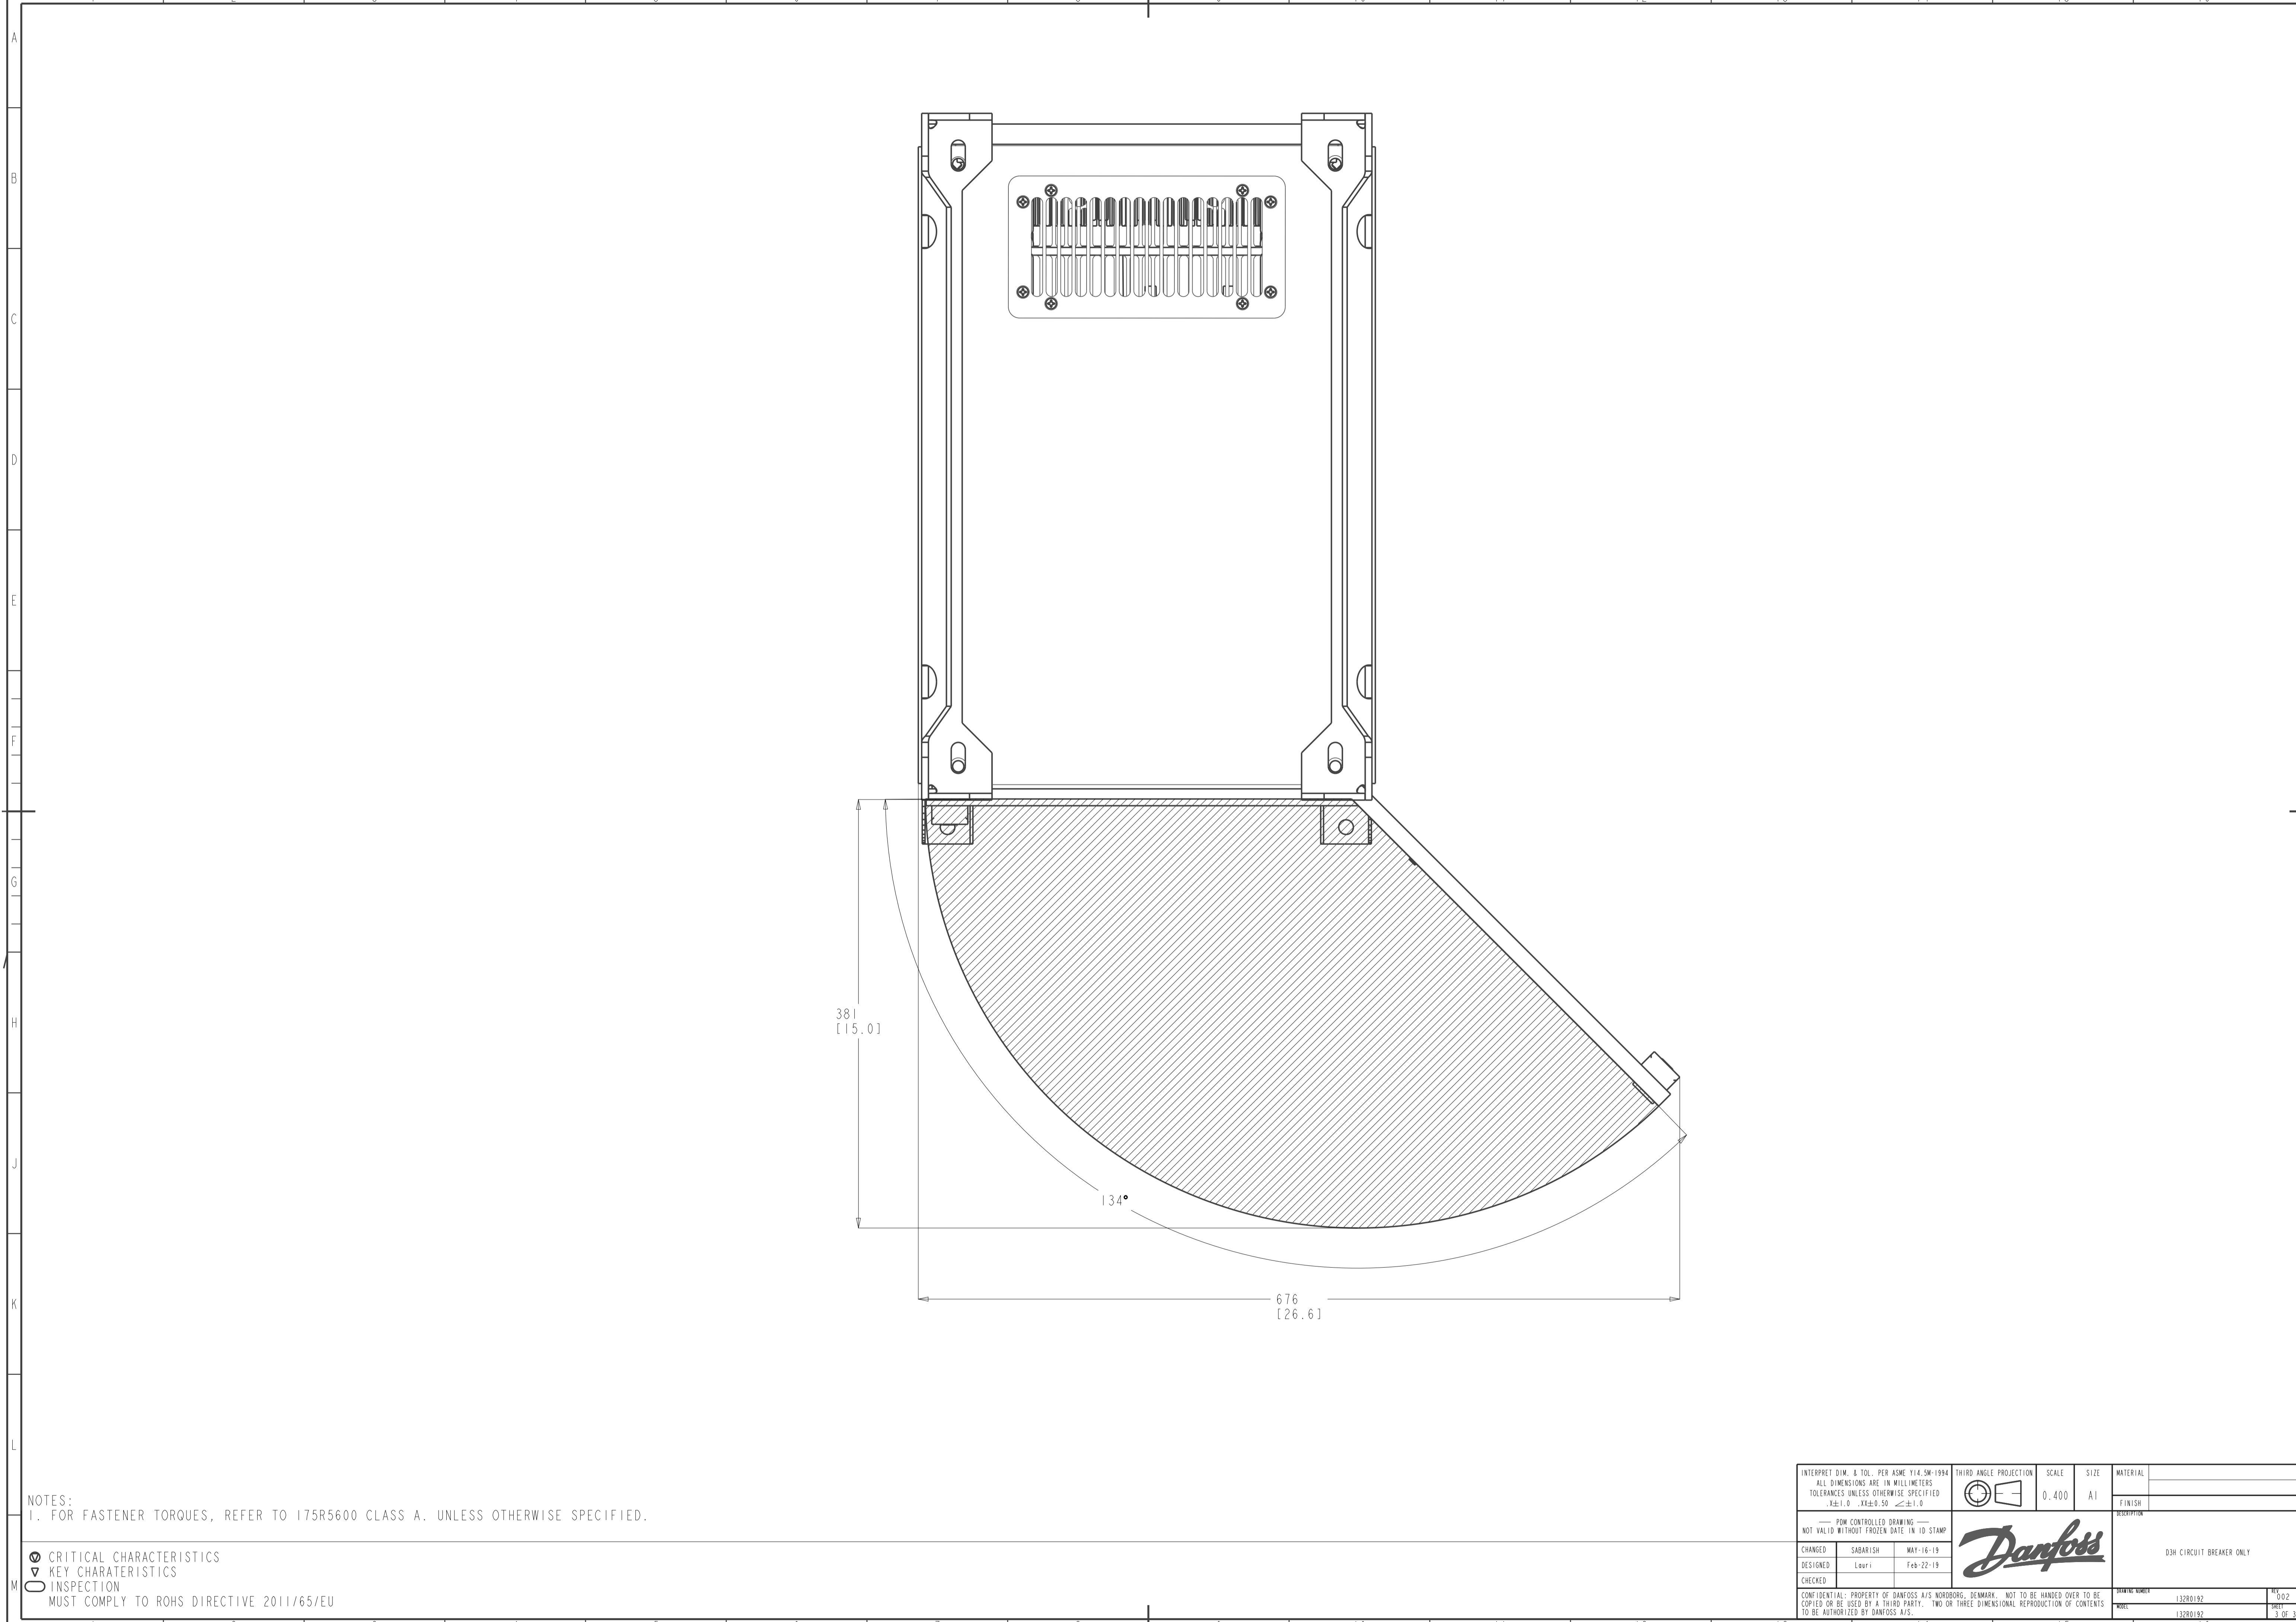

NOTES:  
 1. FOR FASTENER TORQUES, REFER TO 175R5600 CLASS A. UNLESS OTHERWISE SPECIFIED.

- ⊕ CRITICAL CHARACTERISTICS
  - ▽ KEY CHARACTERISTICS
  - INSPECTION
- MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

<small>INTERPRET DIM. &amp; TOL. PER ASME Y14.5M-1994          ALL DIMENSIONS ARE IN MILLIMETERS          TOLERANCES UNLESS OTHERWISE SPECIFIED          .X±1.0 .X±0.50 &lt;±1.0</small>			<small>THIRD ANGLE PROJECTION</small> 	<small>SCALE</small> 0.400	<small>SIZE</small> A1	<small>MATERIAL</small> 
<small>— PDM CONTROLLED DRAWING —          NOT VALID WITHOUT FROZEN DATE IN ID STAMP</small>					<small>FINISH</small> 	
<small>DESIGNED</small> Louv1	<small>SABARISH</small> 	<small>MAY-16-19</small> 			<small>DESCRIPTION</small> 03H CIRCUIT BREAKER ONLY	
<small>CHECKED</small> 	<small>FEB-22-19</small> 					
<small>CONFIDENTIAL: PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.</small>					<small>WORK NUMBER</small> 132R0192	<small>REV</small> 002 <small>SHEET</small> 3 OF 3