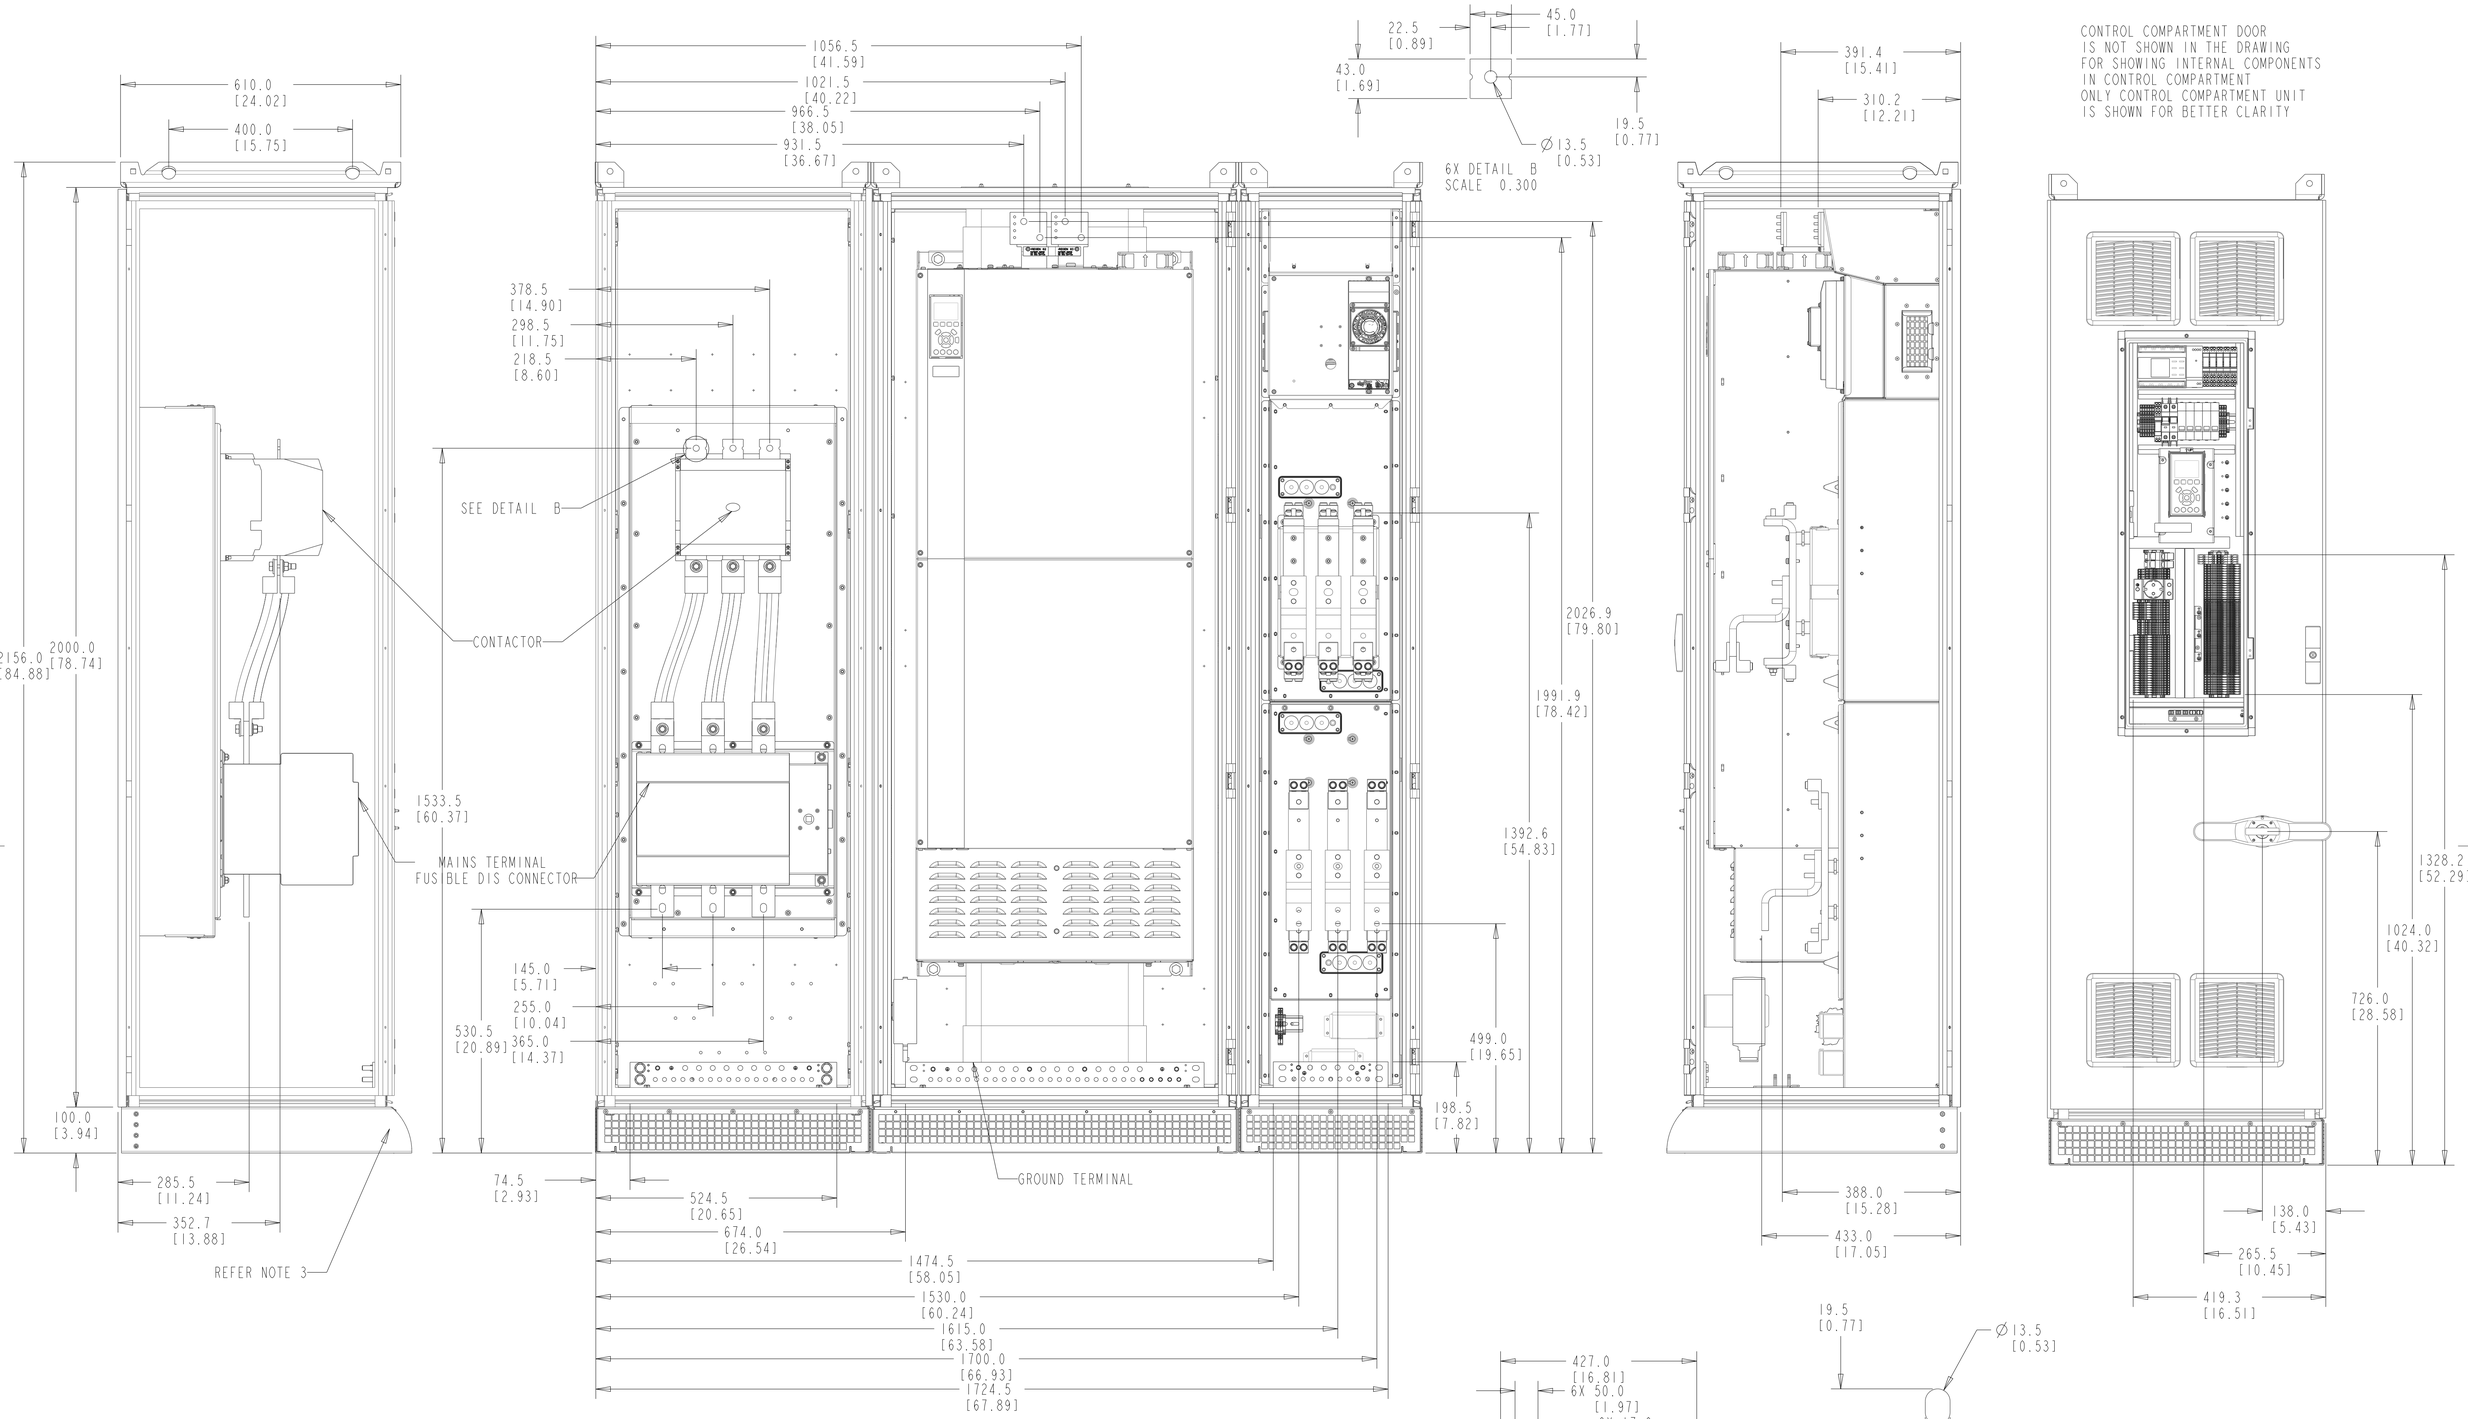

NOTE:
1.BACK CHANNEL COOLING: BOTTOM IN TOP OUT
2.CABLE FEED: BOTTOM ENTRY & BOTTOM OUT
3.PLINTH HEIGHT CAN BE OF100,200, & 400mm HEIG

CRITICAL CHARACTERISTICS
KEY CHARATERISTICS
INSPECTION
MUST COMPLY TO ROHS DIRECTIVE 2011/65/EU

INTERPRET DIM. & TOL. PER ASME Y14.5M-1994 ALL DIMENSIONS ARE IN MILLIMETERS TOLERANCES UNLESS OTHERWISE SPECIFIED .X±1.0 .XX±0.50 ∠±1.0	THIRD ANGLE PROJECTION	SCALE 0.150	SIZE A1	MATERIAL FINISH DESCRIPTION
— PDM CONTROLLED DRAWING — NOT VALID WITHOUT FROZEN DATE IN ID STAMP				MCAD-PLV-E6H-IP54-FUDIS+CON
CHANGED	SABARISH	MAY-29-19		
DESIGNED	Lauri	OCT-17-18		
CHECKED	Nazeer Azam	Digitally signed by Nazeer Azam (Date: 2019.06.18 14:42:03 +05'30')		
CONFIDENTIAL: PROPERTY OF DANFOSS A/S NORDBORG, DENMARK. NOT TO BE HANDED OVER TO BE COPIED OR BE USED BY A THIRD PARTY. TWO OR THREE DIMENSIONAL REPRODUCTION OF CONTENTS TO BE AUTHORIZED BY DANFOSS A/S.				DRAWING NUMBER 132R0186 REV 002 MODEL 132R0186 SHEET 1 OF 3

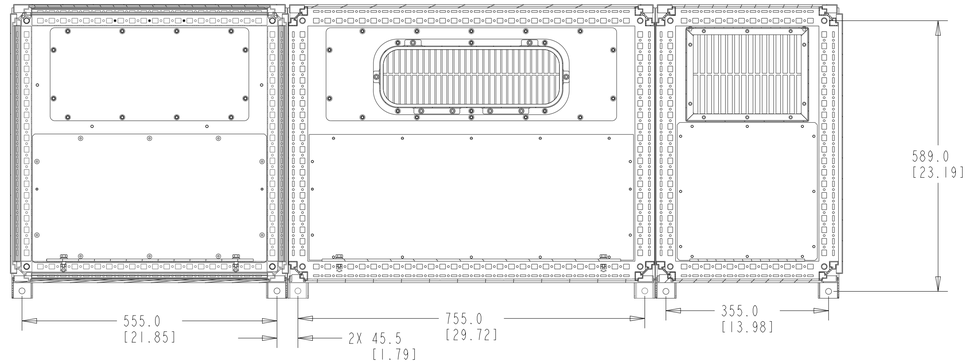

SECTION A-A

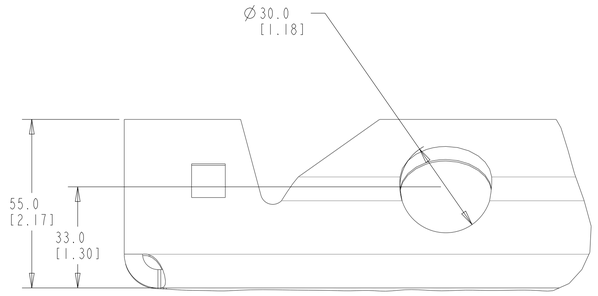

12X DETAIL C
SCALE 1.000

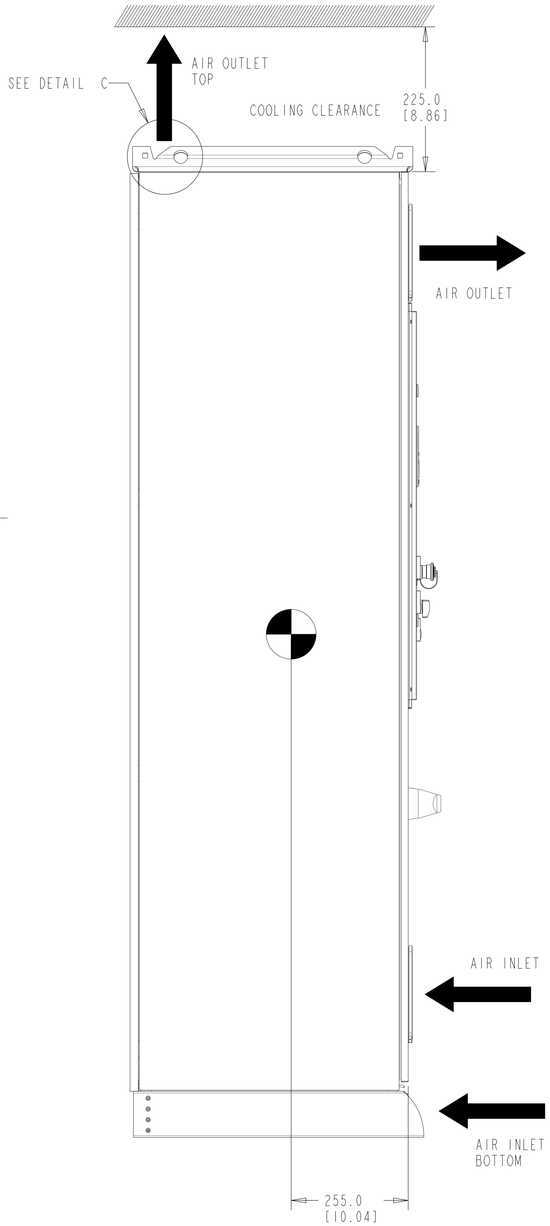

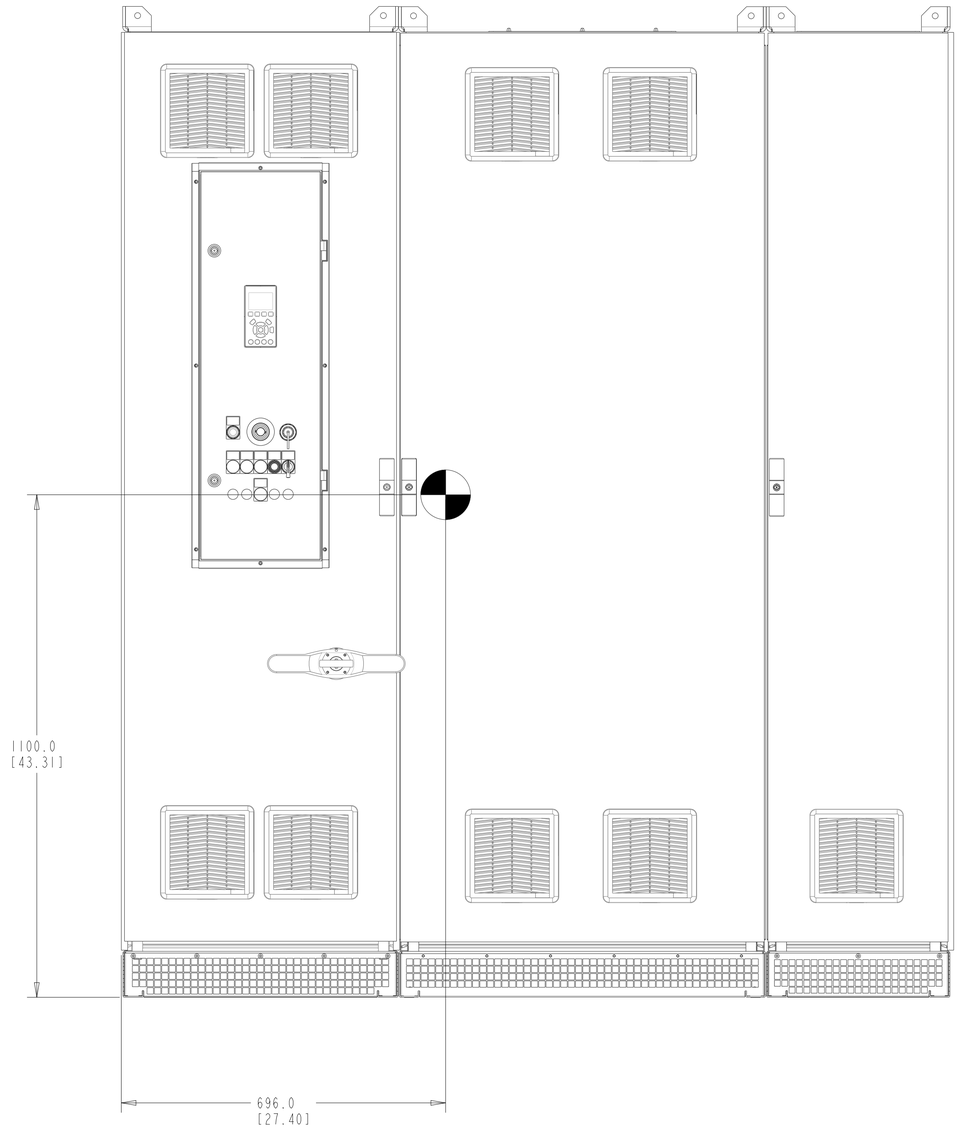

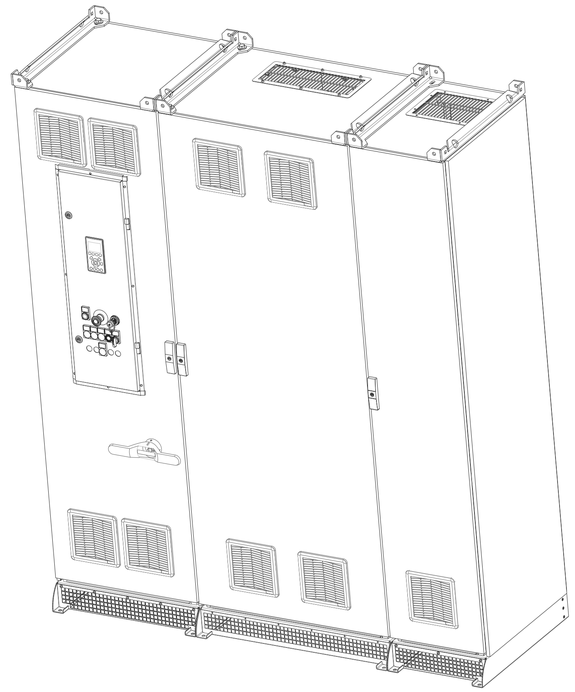

DRAWING NUMBER 132R0186	REV 002
MODEL 132R0186	SHEET 2 OF 3

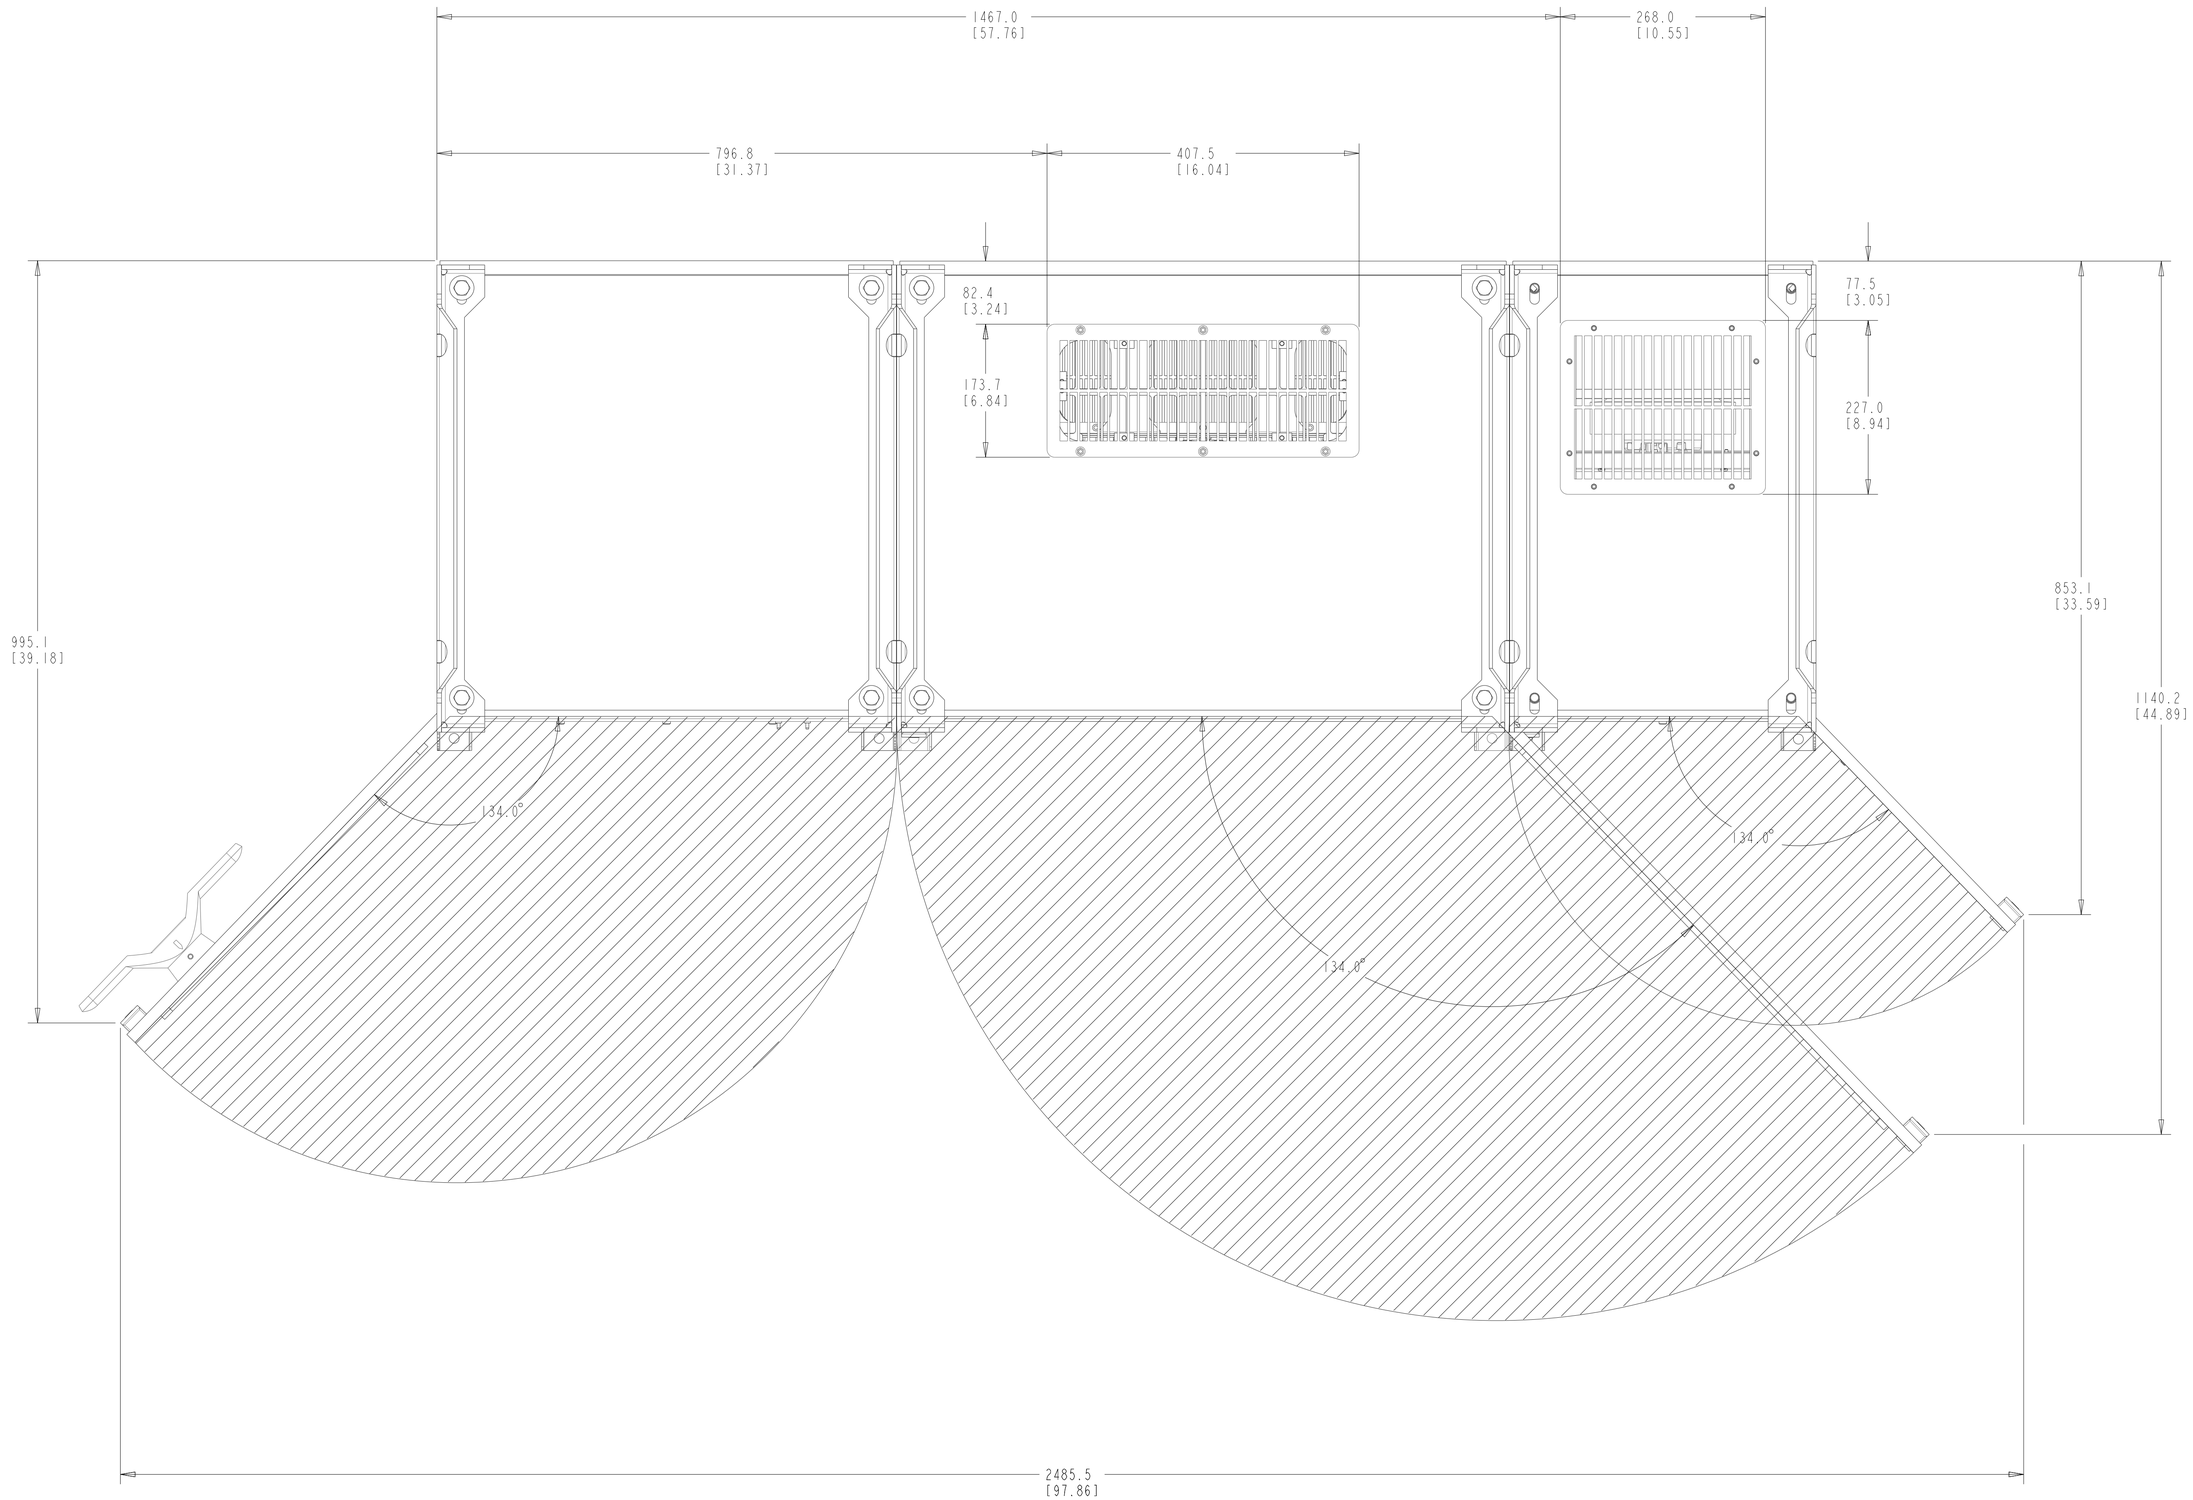

DRAWING NUMBER 132R0186	REV 002
MODEL 132R0186	SHEET 3 OF 3