

# VLT<sup>®</sup> Compact Starter MCD 200

The VLT<sup>®</sup> Compact Starter MCD 200 from Danfoss includes two families of soft starters in the power range from 7.5 to 110 kW.



The series offer easy DIN rail mounting for sizes up to 30 kW, 2-wire or 3-wire start/stop control and excellent starting duty (4 x  $I_{e}$  for 6 seconds).

Heavy starting ratings at 4x  $\rm I_{\rm e}$  for 20 seconds.


Compatible with grounded delta power systems.

**Power range** 7.5 – 110 kW

ENGINEERING TOMORROW

Feature	Benefit	
Small footprint and compact size	<ul> <li>Saves panel space</li> </ul>	
Built-in bypass	<ul> <li>Minimises installation cost and eliminates power loss</li> <li>Reduces heat build up. Savings in components, cooling, wiring and labor</li> </ul>	
Advanced accessoires	<ul> <li>Allows enhanced functionality</li> </ul>	
Advanced SCR Control Algorithms balances output waveform	<ul> <li>Allowing more starts per hour, accepting higher load</li> </ul>	
User friendly	Save commissioning and operating cost	
Easy to install and use	– Saves time	
Easy DIN rail mounting for sizes up to 30 kW	<ul> <li>Saves time and space</li> </ul>	
Reliable	Maximum uptime	
Essential motor protections (MCD 202)	<ul> <li>Reduces overall project investment</li> </ul>	
Max. ambient temperature 50° C without derating	- No external cooling or oversizing necessary	



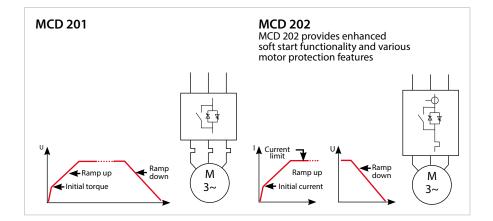



Facts about our products





# Soft Starter for motors up to 110 kW

- Total motor starting solution
- Start, stop and protection features
- Local programming keypad and display

## Optional

- Modules for serial communication:
  - DeviceNet
  - Profibus
  - Modbus RTU
  - USB
- Remote operator kit
- PC software
- Pump application module



#### Remote operator kit

Remote Operator and display with 4–20 mA analogue output proportional to motor current (MCD 202) Serial communication: Modbus RTU, AS-i, Profibus and DeviceNet. PC-based MCD set-up software.

### **Specifications**

Mains supply (I1, L2, L3)		
Supply voltage	3 x 200 VAC – 440 VAC or 3 x 200 – 575 VAC	
Supply frequency	45 – 66 Hz	
Control voltage	100 – 240 VAC 380 – 440 VAC 24 VDC/24 VAC	
Control inputs		
Control inputs	Start, Stop Reset upsh button on the unit	
Relay outputs		
Relay outputs	1 x main contactor 1 x programmable* (Trip or Run)	
Protections, MCD 201		
	Phase sequence Supply fault Shorted SCR	
Protections, MCD 202		
	Motor thermistor input Motor temperature – thermal model Phase imbalance Phase sequence Excess start time Supply fault Shorted SCR	
LED indications		
Indications	Ready/Fault Run	
Ambient operating temperature		
Ambient temperature	-5 to 60°C (above 40°C without derating)	
Standards approvals		
Approvals	CE, UL, C-UL, CCC, C-tick, Lloyds	



# **Cabinet sizes**

Power range (400 V)	7 – 30 kW	37 – 55 kW	75 – 110 kW
Height [mm]	203	215	240
Width [mm]	98	145	202
Depth [mm]	165	193	214

Danfoss VLT Drives, Ulsnaes 1, DK-6300 Graasten, Denmark, Tel. +45 74 88 22 22, Fax +45 74 65 25 80 www.danfoss.com/drives • E-mail: info@danfoss.com

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.