WIRE COLOR SCHEME TERMINAL IDENTIFICATION BLACK - LINE VOLTAGE RED - AC CONTROL - DRIVE TERMINAL WHITE - AC GROUNDED - CUSTOMER TERMINAL CIRCUIT CONDUCTOR
BLUE - DC CONTROL GREEN - CHASSIS GROUND EARTH GROUND EARTH GROUND H\* AC MOTOR OL 4T1 (L1) M2 (T1) 2T1 \*CUSTOMER VLT (L1)\_X\_T1\_ INPUT SUPPLIED T1/U/96 [F16A] L1/R/91 5L2 POWER ADJUSTABLE FREQUENCY 4T2 (L2) (T2) (L2) T2 FEEDER BLK 2L2 3 PH, 240V, L2/S/92 T2/V/97 |F16B| 5L3 | L2/3/92 | |F16C| 5L3 | L3/T/93 DRIVE CIRCUIT BLK 2L3 4T3 (L3) (T3) PROTECTION T3/W/98 (AFD) 60Hz (SEE NOTE 3) CB1 DRIVE INPUT FUSES DRIVE CIRCUIT DISCONNECT BREAKER (L1) (T1) (L2) (T2) EARTH GROUND GRN (L3) (T3) 163 RED X2 F12 115VAC (12) 5 (11) TS1 HEATER (SET: 65° F) CR6 167 (9) (5) (2) FAN 1 (SET: 80° F) (23) (24) TB2 TS1 FAN 2

TO SHEET 2

# WARNING!

THE FOLLOWING TABLE LISTS THE PARAMETERS THAT ARE SET DIFFERENT FROM THE DRIVE DEFAULT SETTINGS. ADDITIONAL PARAMETER SETTINGS MAY BE REQUIRED FOR YOUR APPLICATION.

## NOTES:

1. \* INDICATES COMPONENTS NOT SUPPLIED BY MANUFACTURER.

- 2. REFER TO THE INSTALLATION AND OPERATION MANUAL FOR DRIVE FUNCTIONS AND PARAMETER SETTINGS.
- 3. FEEDER CIRCUIT PROTECTION, INPUT POWER AND MOTOR WIRING MUST BE SELECTED IN ACCORDANCE WITH THE N.E.C., ANY APPLICATION LOCAL CODES AND THE LOAD CURRENT RATING.
- 4. REPLACE JUMPER 'J1' WITH NORMALLY CLOSED SAFETY INTERLOCK CONTACT AS NECESSARY, CONTACT MUST BE RATED 1/4 HP @ 120VAC MINIMUM.
- 5. PANEL MAY REQUIRE DERATING, CONSULT DRIVE MANUAL OR FACTORY FOR FOLLOWING CONDITIONS:

TO SHEET 2

- 5.1. HIGHER SWITCHING FREQUENCY THAN DRIVE DEFAULT
- 5.2. HIGHER THAN PANEL LISTED AMBIENT TEMPERATURES
- 5.3. ELEVATION ABOVE 3300 FEET (1000 METERS)
- 5.4. LONG MOTOR LEAD LENGTHS

## DRIVE PARAMETER SETTINGS

PARAMETER #	NAME	SETTING	VALUE
0-02	MOTOR SPEED UNIT	1	HZ
0-03	REGIONAL SETTINGS	1	NORTH AMERICA
1-03	TORQUE CHAR.	3	AUTO ENERGY OPTIM VT
5-02	TERMINAL 29 TYPE	1	OUTPUT
5-31	TERMINAL 29	5	RUNNING
14-20	RESET MODE	13	INFINITE AUTO REST

В			- NOTICE - THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF DANFOSS DRIVES.	DRN	) <i>T</i>	NAME	
Α	SP10119	11/10	IT IS LOANED BY DANFOSS DRIVES SUBJECT TO THE CONDITIONS THAT IT AND THE INFORMATION EMBODIED THEREIN SHALL BE USED ONLY FOR RECORD AND REFERENCE PURPOSES. SHALL NOT BE USED OR CAUSED TO BE USED	L	)   M		,MAIN
DR	SP10076	09/10	IN ANY WAY PREJUDICIAL TO THE INTERESTS OF DANFOSS DRIVES, SHALL  NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART, OR DISCLOSED	APR	D 71.4	MODFI	,3
REV	ECN	DATE	TO ANYONE WITHOUT THE DIRECT WRITTEN PERMISSION OF DANFOSS DRIVES AND SHALL BE RETURNED UPON REQUEST.	L	) / M	WODEL	VLT

NEMA 3R,240V,2C						
,MAIN CB,	DRIVE	DISC,	DRIVE	FUSE		
,3MB1,SINGLE MOTOR,2 FAN						



WIRE COLOR SCHEME
BLACK - LINE VOLTAGE
RED - AC CONTROL
WHITE - AC GROUNDED

WHITE - AC GROUNDED CIRCUIT CONDUCTOR BLUE - DC CONTROL GREEN - CHASSIS GROUND

## TERMINAL IDENTIFICATION

X - DRIVE TERMINAL


CUSTOMER TERMINAL


#### CUSTOMER DRY CONTACT RATINGS

RELAY	CONTACT RATING
CR1, CR6	5A @ 120VAC 1/10 HP @ 120VAC
M2, M3	10A @ 120/240VAC

### CONTACT SEQUENCE CHART FOR S1 X INDICATES CONTACT CLOSED

X INDICATES CONTACT CLUSED						
POSITION						
CONTACT	DRIVE	OFF	BYPASS			
13-14			Χ			
23-24	X					

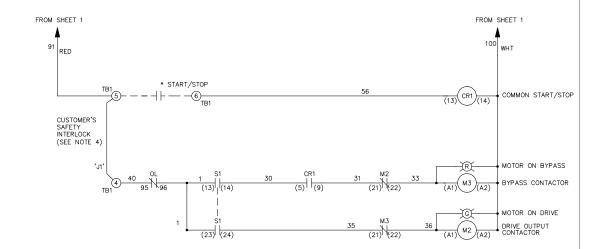

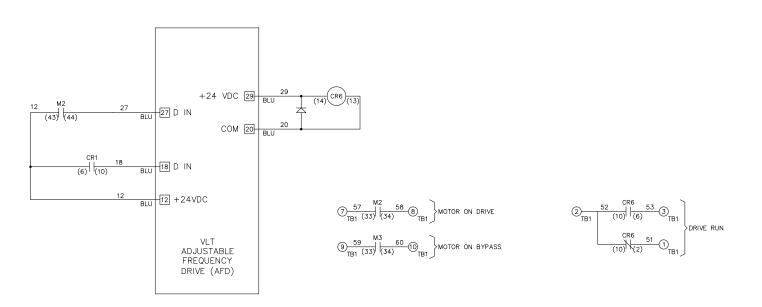

В		
Α	SP10119	11/10
DR	SP10076	09/10
REV	ECN	DATE

- NOTICE 
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF DANFOSS DRIVES.
IT IS LOANED BY DANFOSS DRIVES SUBJECT TO THE CONDITIONS THAT IT AND
THE INFORMATION EMBODIED THEREIN SHALL BE USED ONLY FOR RECORD
AND REFERENCE PURPOSES, SHALL NOT BE USED OR CAUSED TO BE USED
IN ANY WAY PREJUDICIAL TO THE INTERESTS OF DANFOSS DRIVES, SHALL
NOT BE REPRODUCED OR COPIED IN WHOLE OR IN PART, OR DISCLOSED
TO ANYONE WITHOUT THE DIRECT WRITTEN PERMISSION OF DANFOSS DRIVES
AND SHALL BE RETURNED UPON REQUEST.

,	DRN	D TM	

DTM

NAME

NEMA 3R,240V,2C

,MAIN CB, DRIVE DISC, DRIVE FUSE
,3MB1,SINGLE MOTOR,2 FAN



MODEL VLT PAGE 2 OF 2 SIZE NO. 18581182