

WARNING!

THE FOLLOWING TABLE LISTS THE PARAMETERS THAT ARE SET DIFFERENT FROM THE DRIVE DEFAULT SETTINGS. ADDITIONAL PARAMETER SETTINGS MAY BE REQUIRED FOR YOUR APPLICATION.

Drive parameter settings

PARAMETER #	NAME	SETTING	VALUE
0-02	MOTOR SPEED UNIT	1	HZ
0-03	REGIONAL SETTINGS	1	NORTH AMERICA
1-03	TORQUE CHAR.	3	AUTO ENERGY OPTIM VT
5-02	TERMINAL 29 TYPE	1	OUTPUT
5-31	TERMINAL 29	5	RUNNING
14-20 RESET MODE		13	INFINITE AUTO REST

NOTES:
1. * INDICATES COMPONENTS NOT SUPPLIED BY MANUFACTURER.

REFER TO THE INSTALLATION AND OPERATION MANUAL FOR DRIVE FUNCTIONS AND PARAMETER SETTINGS.

3. FEEDER CIRCUIT PROTECTION, INPUT POWER AND MOTOR WIRING MUST BE SELECTED IN ACCORDANCE WITH

THE N.E.C., ANY APPLICATION LOCAL CODES AND THE LOAD CURRENT RATING.

4. REPLACE JUMPER 'J1' WITH NORMALLY CLOSED SAFETY INTERLOCK CONTACT AS NECESSARY. CONTACT MUST BE RATED 1/4 HP @ 120VAC MINIMUM.

5. PANEL MAY REQUIRE DERATING, CONSULT DRIVE MANUAL OR FACTORY FOR FOLLOWING CONDITIONS:

5.1. HIGHER SWITCHING FREQUENCY THAN DRIVE DEFAULT

5.2. HIGHER THAN PANEL LISTED AMBIENT TEMPERATURES

5.3. ELEVATION ABOVE 3300 FEET (1000 METERS)

5.4. LONG MOTOR LEAD LENGTHS

В			-NOTICE-	DRN	NAME	Ν	EMA 3R,208V,2C		THE TRANE COMPANY
А	SP10119	11/10	THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO	D TM	, M		ISC, DRIVE DISC,		FUSE A DIVISION OF AMERICAN STANDARD INC.
DR	SP10076	09/10	OUTSIDE PARTIES WITHOUT THE WRITTEN	APR		,3MB,IF	R,SINGLE MOTOR,1		
REV	ECN	DATE	CONSENT OF THE TRANE COMPANY	D TM	MODEL	TR200	PAGE <u>1</u> OF <u>2</u>	SIZE	No. 185B2421

WIRE COLOR SCHEME BLACK - LINE VOLTAGE
RED - AC CONTROL
WHITE - AC GROUNDED
CIRCUIT CONDUCTOR
BLUE - DC CONTROL
GREEN - CHASSIS GROUND


TERMINAL IDENTIFICATION

X - DRIVE TERMINAL


X - CUSTOMER TERMINAL


CUSTOMER DRY CONTACT RATINGS

RELAY	CONTACT RATING		
CR6	5A @ 120VAC 1/10 HP @ 120VAC		
M2, M3	10A @ 120/240VAC		



X INDICATES CONTACT CLOSED						
POSITION						
CONTACT	DRIVE	OFF	BYPASS			
13-14			Χ			
23-24	Χ					

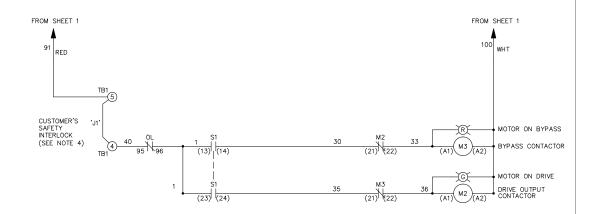

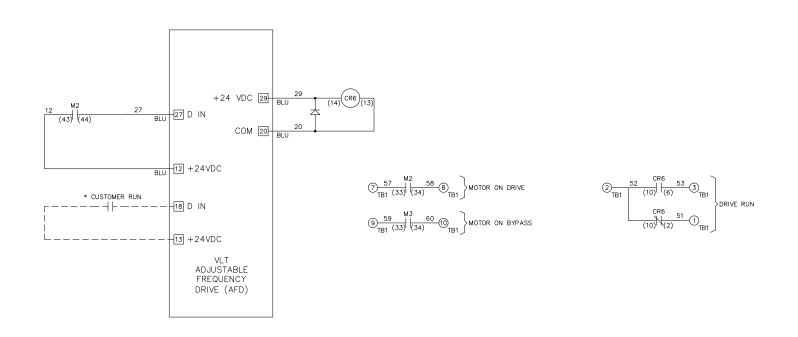

В		
Α	SP10119	11/10
DR	SP10076	09/10
REV	ECN	DATE

-NOTICE-
THIS DRAWING IS PROPRIETARY AND SHALL NOT BE COPIED OR ITS CONTENTS DISCLOSED TO OUTSIDE PARTIES WITHOUT THE WRITTEN CONSENT OF THE TRANE COMPANY

drn <i>DTM</i>	,MAIN FUSE D	EMA 3R,208V,2C ISC, DRIVE DISC, S.SINGLE MOTOR.	DRIVE		THE TRANE COMPA A DIVISION OF AMERICAN STANDARD I
apr D <i>TM</i>	MODEL TR200	PAGE 2 OF 2		DWG 1 8	5B2421

THE	TRA	NE	COM	PANY
AMER			ON OF NDAR	D INC.